

PROFESSIONAL PNEUMATIC TOOLS

PART
ONE



www.worcetools.com



Made in Taiwan



Impact Wrenches



Features :

- Composite Motor Housing
- Reversing Bar on Both Sides
- Two Speed Trigger
- Handle Exhaust
- Patented Silencer 83 dB (A)

Composite

WX-40-7500

1/4 " Mini Impact Wrench



WX-40-7254P

1/4 " Mini Impact Wrench



WX-40-7253P

1/4 " Mini Impact Wrench



Model No.	Free Speed (RPM)	Anvil Size Inch (mm)	Maximum Torque Ft-lbs (Nm)	Working Torque Range Ft-lbs (Nm)	Air Inlet (NPT)	Hose Size ID Inch (mm)	Average Air Consumption CFN (L/Min)	Length Inch (mm)	Weight Lbs (Kg)	Noise Level dB (A)
WX-40-7253P	11,000	1/4"	75 (102)	25 - 70 (34 - 95)	1/4"	3/8 (10)	4 (113)	6 (154)	2.2 (1.0)	83
WX-40-7254P	11,000	1/4"	75 (102)	25 - 70 (34 - 95)	1/4"	3/8 (10)	4 (113)	6 (154)	2.2 (1.0)	83
WX-40-7500	12,000	1/4"	75 (102)	25 - 70 (34 - 95)	1/4"	3/8 (10)	4 (113)	6-7/8 (174)	2.2 (1.0)	83

Impact Wrenches

Impact Wrenches



Features :

- Composite Motor Housing
- Twin Hammer Clutch Mechanism
- Light Weight
- Handle Exhaust
- Patented Silencer 83 dB (A)

Composite

WX-41-7500P

3/8 " Mini Impact Wrench



WX-41-7254P

3/8 " Mini Impact Wrench



WX-41-7253P

3/8 " Mini Impact Wrench



Model No.	Free Speed (RPM)	Anvil Size Inch (mm)	Maximum Torque Ft-lbs (Nm)	Working Torque Range Ft-lbs (Nm)	Air Inlet (NPT)	Hose Size ID Inch (mm)	Average Air Consumption CFN (L/Min)	Length Inch (mm)	Weight Lbs (Kg)	Noise Level dB (A)
WX-41-7253P	11,000	3/8 (10)	100 (136)	25-90 (34-122)	1/4"	3/8 (10)	4 (113)	6 (154)	2.2 (1.0)	83
WX-41-7254P	11,000	3/8 (10)	100 (136)	25-90 (34-122)	1/4"	3/8 (10)	4 (113)	6 (154)	2.2 (1.0)	83
WX-41-7500	12,000	3/8 (10)	100 (136)	25-90 (34-122)	1/4"	3/8 (10)	4 (113)	6-7/8 (174)	2.2 (1.0)	83

Impact Wrenches

Impact Wrenches



Features :

- Composite Motor Housing
- Twin Hammer Clutch Mechanism
- Light Weight
- Handle Exhaust
- Patented Silencer 83 dB (A)

Composite

WX-41-4019P
3/8 " Impact Wrench



WX-41-4024P
3/8 " Impact Wrench



*Accessories
(Optional)
Rubber Boot*

WX-41-4012P
3/8 " Impact Wrench



Model No.	Free Speed (RPM)	Anvil Size Inch (mm)	Maximum Torque Ft-lbs (Nm)	Working Torque Range Ft-lbs (Nm)	Air Inlet (NPT)	Hose Size ID Inch (mm)	Average Air Consumption CFN (L/Min)	Length Inch (mm)	Weight Lbs (Kg)	Noise Level dB (A)
WX-41-4012P	11,000	3/8 (10)	430 (583)	25-250 (34-338)	1/4"	3/8 (10)	4 (113)	6 (154)	2.6 (1.2)	83
WX-41-4019P	11,000	3/8 (10)	430 (583)	25-250 (34-338)	1/4"	3/8 (10)	4 (113)	6 (154)	2.6 (1.2)	83
WX-41-4024P	11,000	3/8 (10)	430 (583)	25-250 (34-338)	1/4"	3/8 (10)	4 (113)	6 (154)	2.6 (1.2)	83

Impact Wrenches

Impact Wrenches



Features :

- *Twin Hammer Clutch Mechanism*
- *Handle Exhaust*
- *Thumb Operated Forward and Reverse*

WX-41-4114P
3/8 " Impact Wrench



WX-41-4017G
3/8 " Impact Wrench



WX-41-4113P
3/8 " Impact Wrench



Model No.	Free Speed (RPM)	Anvil Size Inch (mm)	Maximum Torque Ft-lbs (Nm)	Working Torque Range Ft-lbs (Nm)	Air Inlet (NPT)	Hose Size ID Inch (mm)	Average Air Consumption CFN (L/Min)	Length Inch (mm)	Weight Lbs (Kg)
WX-41-4017G	11,000	3/8 (10)	400 (542)	25-300 (34-407)	1/4"	3/8 (10)	5 (142)	6-1/4 (156)	3.5 (1.6)
WX-41-4113P	11,000	3/8 (10)	430 (583)	25-250 (34-338)	1/4"	3/8 (10)	4 (113)	6 (157)	2.84 (1.29)
WX-41-4114P	12,000	3/8 (10)	430 (583)	25-250 (34-338)	1/4"	3/8 (10)	4 (113)	5-5/8 (142)	2.73 (1.24)

Impact Wrenches



WX-0775

3/8 " Impact Wrench
- Single Hammer



WX-401AK

3/8 " Butterfly Impact Wrench Kit
- Single Hammer

In Blow Molded Case Complete With:
1 pc WX-401A 3/8" Butterfly Impact Wrench
7 pcs Socket : 8, 10, 11, 12, 13, 14, 17, 19 mm
1 pc 3" Extension Bar
1 pc Bit Holder
1 pc Blow Mold Case



WX-401A

3/8 " Impact Wrench
- Single Hammer
- Heavy Duty



WX-401

3/8 " Butterfly Impact Wrench
- Single Hammer



Model No.	Free Speed (RPM)	Anvil Size Inch (mm)	Maximum Torque Ft-lbs (Nm)	Working Torque Range Ft-lbs (Nm)	Air Inlet (NPT)	Hose Size ID Inch (mm)	Average Air Consumption CFN (L/Min)	Length Inch (mm)	Weight Lbs (Kg)
WX-0775	10,000	3/8 (10)	75 (101)	5-50 (7-68)	1/4"	3/8 (10)	3 (85)	5-3/8 (135)	2 (0.9)
WX-401	10,000	3/8 (10)	75 (101)	5-50 (7-68)	1/4"	3/8 (10)	3 (85)	5-7/8 (150)	2 (0.9)
WX-401A	10,000	3/8 (10)	75 (101)	5-50 (7-68)	1/4"	3/8 (10)	3 (85)	5-7/8 (150)	2 (0.9)

Impact Wrenches



Features :

- Ultra Compact and Powerful
- Aluminum Handle with Steel Clutch Housing

WX-41-4001
3/8" Stubby Impact Wrench
- Twin Hammer



WX-41-4002
3/8" Stubby Impact Wrench
- Jumbo Hammer



Model No.	Free Speed (RPM)	Anvil Size Inch (mm)	Maximum Torque Ft-lbs (Nm)	Working Torque Range Ft-lbs (Nm)	Air Inlet (NPT)	Hose Size ID Inch (mm)	Average Air Consumption CFN (L/Min)	Length Inch (mm)	Weight Lbs (Kg)
WX-41-4001	10,000	3/8 (10)	500 (678)	25-300 (34-407)	1/4"	3/8 (10)	4 (113)	4-3/4 (120)	3.4 (1.54)
WX-41-4002	10,000	3/8 (10)	450 (610)	25-300 (34-407)	1/4"	3/8 (10)	4 (113)	4-3/8 (109)	3.2 (1.44)

Impact Wrenches



Features :

- Built-in Comfort Grip
- Handle Exhaust
- Twin Hammer Clutch Mechanism

WX-43-4037G
1/2" Impact Wrench



WX-43-4017G
1/2" Impact Wrench



Model No.	Free Speed (RPM)	Anvil Size Inch (mm)	Maximum Torque Ft-lbs (Nm)	Working Torque Range Ft-lbs (Nm)	Air Inlet (NPT)	Hose Size ID Inch (mm)	Average Air Consumption CFN (L/Min)	Length Inch (mm)	Weight Lbs (Kg)
WX-43-4017G	11,000	1/2 (13)	400 (542)	25-300 (34-407)	1/4"	3/8 (10)	5 (142)	6-1/4 (156)	3.5 (1.6)
WX-43-4037G	8,000	1/2 (13)	900 (1,220)	50-700 (68-949)	1/4"	3/8 (10)	6 (170)	7-3/8 (185)	6 (2.7)

Impact Wrenches



Features :

- Composite Motor Housing
- Twin Hammer Clutch Mechanism
- Push Button One Hand Forward / Reverse
- Light Weight
- Low Noise 83 dB (A)

WX-43-4033P
1/2" Impact Wrench



Accessories
(Optional)
Rubber Boot

WX-43-4012P
1/2" Impact Wrench



Accessories
(Optional)
Rubber Boot

Composite

Model No.	Free Speed (RPM)	Anvil Size Inch (mm)	Maximum Torque Ft-lbs (Nm)	Working Torque Range Ft-lbs (Nm)	Air Inlet (NPT)	Hose Size ID Inch (mm)	Average Air Consumption CFN (L/Min)	Length Inch (mm)	Weight Lbs (Kg)	Noise Level dB (A)
WX-43-4012P	11,000	1/2 (13)	460 (624)	25-250 (34-338)	1/4"	3/8 (10)	4 (113)	6 (153)	2.6 (1.2)	83
WX-43-4033P	7,000	1/2 (13)	820 (1,112)	50-580 (68-786)	1/4"	3/8 (10)	4 (113)	7-3/16 (183)	4 (1.9)	83

Impact Wrenches



Features :

- Composite Motor Housing
- Twin Hammer Clutch Mechanism
- Push Button One Hand Forward / Reverse
- Light Weight
- Low Noise 83 dB (A)

Features :

- Composite Motor Housing
- Twin Hammer Clutch Mechanism
- Dial Style Forward / Reverse With 3 Speeds
- Handle Exhaust
- 360° Swivel Air Inlet

WX-43-4034P

1/2 " Impact Wrench



Accessories
(Optional)
Rubber Boot

WX-43-4031P1

1/2 " Impact Wrench



Composite

Model No.	Free Speed (RPM)	Anvil Size Inch (mm)	Maximum Torque Ft-lbs (Nm)	Working Torque Range Ft-lbs (Nm)	Air Inlet (NPT)	Hose Size ID Inch (mm)	Average Air Consumption CFN (L/Min)	Length Inch (mm)	Weight Lbs (Kg)	Noise Level dB (A)
WX-43-4031P1	7,000	1/2 (13)	680 (922)	50-550 (68-746)	1/4"	1/2 (13)	4.4 (125)	8 (204)	4.8 (2.2)	88
WX-43-4034P	7,000	1/2 (13)	820 (1,112)	50-580 (68-786)	1/4"	3/8 (10)	4 (113)	7-1/4 (183)	4 (1.9)	83

Impact Wrenches

Impact Wrenches



Features :

- Composite Motor Housing
- Twin Hammer Clutch Mechanism
- Dial Style Forward / Reverse With 3 Speeds
- Handle Exhaust
- Low Noise 83 dB (A)

Features :

- Composite Motor Housing
- Twin Hammer Clutch Mechanism
- Push Button One Hand Forward / Reverse
- Light Weight
- Low Noise 83 dB (A)

WX-43-4036P

1/2 " Impact Wrench



Composite

WX-43-4024P

1/2 " Impact Wrench



Accessories
(Optional)
Rubber Boot

Impact Wrenches

Model No.	Free Speed (RPM)	Anvil Size Inch (mm)	Maximum Torque Ft-lbs (Nm)	Working Torque Range Ft-lbs (Nm)	Air Inlet (NPT)	Hose Size ID Inch (mm)	Average Air Consumption CFN (L/Min)	Length Inch (mm)	Weight Lbs (Kg)	Noise Level dB (A)
WX-43-4036P	7,000	1/2 (13)	780 (1,054)	50-550 (68-746)	1/4"	3/8 (10)	4 (113)	7-1/4 (183)	4 (1.9)	83
WX-43-4024P	11,000	1/2 (13)	460 (624)	25-250 (34-338)	1/4"	3/8 (10)	4 (113)	6 (153)	2.6 (1.2)	83

Impact Wrenches



Features :

- Composite Motor Housing
- Twin Hammer Clutch Mechanism
- Thumb Operated Forward and Reverse Switches Provide One Hand Operation
- Variable Speed Trigger

WX-43-4134P

1/2 " Impact Wrench



WX-43-4114P

1/2 " Impact Wrench



Composite

Impact Wrenches

Model No.	Free Speed (RPM)	Anvil Size Inch (mm)	Maximum Torque Ft-lbs (Nm)	Working Torque Range Ft-lbs (Nm)	Air Inlet (NPT)	Hose Size ID Inch (mm)	Average Air Consumption CFN (L/Min)	Length Inch (mm)	Weight Lbs (Kg)
WX-43-4114P	12,000	1/2 (13)	460 (624)	25-250 (34-338)	1/4"	3/8 (10)	4 (113)	5-5/8 (142)	2.73 (1.24)
WX-43-4134P	8,000	1/2 (13)	820 (1,112)	50-580 (68-786)	1/4"	3/8 (10)	4 (113)	7-3/8 (187)	4.21 (1.91)

Impact Wrenches



Features :

- Composite Motor Housing
- Twin Hammer Clutch Mechanism
- Push Button One Hand Forward / Reverse
- Light Weight
- Low Noise 83 dB (A)

WX-43-4039P

1/2 " Impact Wrench



Composite

WX-43-4019P

1/2 " Impact Wrench



Air Regulator

(3 Different Speeds of Forward / Reverse)



► One Hand - Forward / Reverse

Impact Wrenches

Model No.	Free Speed (RPM)	Anvil Size Inch (mm)	Maximum Torque Ft-lbs (Nm)	Working Torque Range Ft-lbs (Nm)	Air Inlet (NPT)	Hose Size ID Inch (mm)	Average Air Consumption CFN (L/Min)	Length Inch (mm)	Weight Lbs (Kg)	Noise Level dB (A)
WX-43-4019P	11,000	1/2 (13)	460 (624)	25-250 (34-338)	1/4"	3/8 (10)	4 (113)	6 (153)	2.6 (1.2)	83
WX-43-4039P	7,000	1/2 (13)	820 (1,112)	50-580 (68-786)	1/4"	3/8 (10)	4 (113)	7-3/16 (183)	4 (1.9)	83

Impact Wrenches



Features :

- Composite Motor Housing
- Twin Hammer / Pin Clutch
- Handle Exhaust (silencer)
- Reverse : Full Power
- Forward : 3 Different Speeds

WX-43-4131P2
1/2 " Impact Wrench
- Pin Clutch



WX-43-4131P1
1/2 " Impact Wrench
- Twin Hammer



Composite

Model No.	Free Speed (RPM)	Anvil Size Inch (mm)	Maximum Torque Ft-lbs (Nm)	Working Torque Range Ft-lbs (Nm)	Air Inlet (NPT)	Hose Size ID Inch (mm)	Average Air Consumption CFN (L/Min)	Length Inch (mm)	Weight Lbs (Kg)
WX-43-4131P1	9,000	1/2 (13)	780 (1,054)	50-550 (68-746)	1/4"	3/8 (10)	4.4 (125)	7-3/8 (186)	4.58 (2.08)
WX-43-4131P2	8,000	1/2 (13)	780 (1,054)	50-550 (68-746)	1/4"	3/8 (10)	4.4 (125)	7-3/8 (186)	4.67 (2.12)

Impact Wrenches



WX-43-4113P

1/2 " Mini Impact Wrench

- Twin Hammer Clutch
- Composite Motor Housing
- Handle Exhaust (Silencer)
- Forward : 3 Different Speeds
- Reverse : Full Power



WX-43-4038P

1/2 " Super Impact Wrench

- Twin Hammer Clutch
- Composite Motor Housing
- 7 Rotor Vanes - Composite
- Variable Speed Trigger
- BIAS Air Motor
- Forward : 3 Different Speeds
- Reverse : Full Power



WX-43-4133P2

1/2 " Impact Wrench

- Pin Clutch
- Composite Motor Housing
- Handle Exhaust (Silencer)
- Forward : 3 Different Speeds
- Reverse : Full Power

Composite



WX-43-4133P1

1/2 " Impact Wrench

- Twin Hammer Clutch
- Composite Motor Housing
- Handle Exhaust (Silencer)
- Forward : 3 Different Speeds
- Reverse : Full Power

Impact Wrenches

Model No.	Free Speed (RPM)	Anvil Size Inch (mm)	Maximum Torque Ft-lbs (Nm)	Working Torque Range Ft-lbs (Nm)	Air Inlet (NPT)	Hose Size ID Inch (mm)	Average Air Consumption CFN (L/Min)	Length Inch (mm)	Weight Lbs (Kg)
WX-43-4038P	7,500	1/2 (13)	950 (1,288)	50-580 (68-786)	1/4"	3/8 (10)	4 (113)	7-3/8 (185)	4.3 (1.94)
WX-43-4113P	11,000	1/2 (13)	460 (624)	25-250 (34-338)	1/4"	3/8 (10)	4 (113)	6 (157)	2.84 (1.29)
WX-43-4133P1	9,000	1/2 (13)	780 (1,054)	50-550 (68-746)	1/4"	3/8 (10)	4.4 (125)	7-3/8 (186)	4.5 (2.04)
WX-43-4133P2	8,000	1/2 (13)	780 (1,054)	50-550 (68-746)	1/4"	3/8 (10)	4.4 (125)	7-3/8 (186)	4.58 (2.08)

Impact Wrenches



Features :

- Ultra Compact and Powerful
- Aluminum Handle with Steel Clutch Housing

WX-43-4002
1/2 " Stubby Impact Wrench
- Jumbo Hammer




WX-43-4001
1/2 " Stubby Impact Wrench
- Twin Hammer



Model No.	Free Speed (RPM)	Anvil Size Inch (mm)	Maximum Torque Ft-lbs (Nm)	Working Torque Range Ft-lbs (Nm)	Air Inlet (NPT)	Hose Size ID Inch (mm)	Average Air Consumption CFN (L/Min)	Length Inch (mm)	Weight Lbs (Kg)
WX-43-4001	10,000	1/2 (13)	500 (678)	25-300 (34-407)	1/4"	3/8 (10)	4 (113)	4-3/4 (120)	3.4 (1.54)
WX-43-4002	10,000	1/2 (13)	450 (610)	25-300 (34-407)	1/4"	3/8 (10)	4 (113)	4-3/8 (109)	3.2 (1.44)

Impact Wrenches

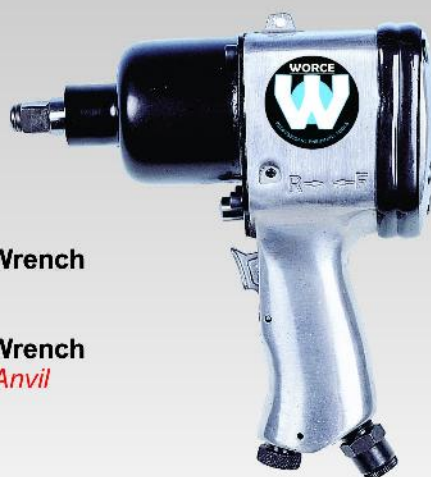

WX-0717
1/2" Impact Wrench
- Pin Clutch
WX-0717L
1/2" Impact Wrench
- with 2" Ext. Anvil



WX-0716
1/2" Impact Wrench
- Pin Clutch
WX-0716L
1/2" Impact Wrench
- with 2" Ext. Anvil



WX-4011A
1/2" Butterfly Impact Wrench
- Single Hammer
- Heavy Duty
- With Grip



WX-403
1/2" Impact Wrench
- Single Hammer
WX-403L
1/2" Impact Wrench
- with 2" Ext. Anvil

Model No.	Free Speed (RPM)	Anvil Size Inch (mm)	Maximum Torque Ft-lbs (Nm)	Bolt Capacity	Air Inlet (NPT)	Hose Size ID Inch (mm)	Average Air Consumption CFN (L/Min)	Length Inch (mm)	Weight Lbs (Kg)
WX-403	7,000	1/2 (13)	250 (337)	5/8"	1/4"	3/8 (10)	4 (113)	7-1/4 (182)	5.25 (2.4)
WX-0716	7,000	1/2 (13)	280 (378)	5/8"	1/4"	3/8 (10)	4 (113)	7-1/4 (184)	5.25 (2.4)
WX-0717	7,000	1/2 (13)	380 (513)	5/8"	1/4"	3/8 (10)	4.2 (119)	7-1/2 (191)	5.9 (2.7)
WX-4011A	10,000	1/2 (13)	75 (101)		1/4"	3/8 (10)	3 (85)	6-1/8 (156)	2 (0.9)
WX-403L	7,000	1/2 (13)	250 (337)	5/8"	1/4"	3/8 (10)	4 (113)	8-1/4 (210)	6.25 (2.8)
WX-0716L	7,000	1/2 (13)	280 (378)	5/8"	1/4"	3/8 (10)	4 (113)	9-1/4 (235)	6.25 (2.8)
WX-0717L	7,000	1/2 (13)	380 (513)	5/8"	1/4"	3/8 (10)	4.2 (119)	9-1/2 (241)	6.9 (3.1)

Impact Wrenches



WX-43-231FRG
1/2 " Impact Wrench
- Twin Hammer
- Front Exhaust
- With Handle Grip



WX-43-231F
1/2 " Impact Wrench
- Twin Hammer
- Front Exhaust



WX-43-231HRG
1/2 " Impact Wrench
- Twin Hammer
- Handle Exhaust
- With Handle Grip



WX-43-231H
1/2 " Impact Wrench
- Twin Hammer
- Handle Exhaust
WX-43-231HL
1/2 " Impact Wrench
- Twin Hammer
- Handle Exhaust
- with 2" Ext. Anvil

Model No.	Free Speed (RPM)	Anvil Size Inch (mm)	Maximum Torque Ft-lbs (Nm)	Working Torque Range Ft-lbs (Nm)	Air Inlet (NPT)	Hose Size ID Inch (mm)	Average Air Consumption CFN (L/Min)	Length Inch (mm)	Weight Lbs (Kg)
WX-43-231F	9,000	1/2 (13)	680 (922)	25-400 (34-542)	1/4"	3/8 (10)	4.2 (120)	7-1/4 (185)	5.8 (2.63)
WX-43-231FRG	9,000	1/2 (13)	680 (922)	25-400 (34-542)	1/4"	3/8 (10)	4.2 (120)	7-1/4 (185)	5.8 (2.63)
WX-43-231H	8,000	1/2 (13)	680 (922)	25-400 (34-542)	1/4"	3/8 (10)	4.2 (120)	7-1/4 (185)	5.8 (2.63)
WX-43-231HRG	8,000	1/2 (13)	680 (922)	25-400 (34-542)	1/4"	3/8 (10)	4.2 (120)	7-1/4 (185)	5.8 (2.63)
WX-43-231HL	8,000	1/2 (13)	680 (922)	25-400 (34-542)	1/4"	3/8 (10)	4.2 (120)	9-1/8 (237)	6 (2.7)

Impact Wrenches



WX-43-4033PL
1/2 " Impact Wrench
- Twin Hammer
- With 2" Ext. Anvil

Accessories
(Optional)
Rubber Boot



WX-43-231HL
1/2 " Impact Wrench
- Twin Hammer
- Handle Exhaust
- With 2" Ext. Anvil



WX-43-4034PL
1/2 " Impact Wrench
- Twin Hammer
- With 2" Ext. Anvil

Accessories
(Optional)
Rubber Boot



WX-43-4038PL
1/2 " Impact Wrench
- Twin Hammer
- With 2" Ext. Anvil



WX-43-4134L
1/2 " Impact Wrench
- Twin Hammer
- With Handle Grip



WX-43-4133PL
1/2 " Impact Wrench
- Twin Hammer
- With 2" Ext. Anvil

Model No.	Free Speed (RPM)	Anvil Size Inch (mm)	Maximum Torque Ft-lbs (Nm)	Working Torque Range Ft-lbs (Nm)	Air Inlet (NPT)	Hose Size ID Inch (mm)	Average Air Consumption CFN (L/Min)	Length Inch (mm)	Weight Lbs (Kg)
WX-43-231HL	8,000	1/2 (13)	680 (922)	25-400 (34-542)	1/4"	3/8 (10)	4.2 (120)	9-1/8 (237)	6 (2.7)
WX-43-4033PL	7,000	1/2 (13)	820 (1,112)	50-580 (68-786)	1/4"	3/8 (10)	4 (113)	9-1/4 (236)	4.4 (2.0)
WX-43-4034PL	7,000	1/2 (13)	820 (1,112)	50-580 (68-786)	1/4"	3/8 (10)	4 (113)	9-1/4 (236)	4.3 (1.97)
WX-43-4038PL	7,500	1/2 (13)	950 (1,288)	50-580 (68-786)	1/4"	3/8 (10)	4 (113)	9-3/8 (238)	4.4 (2.0)
WX-43-4133PL	9,000	1/2 (13)	780 (1,054)	50-550 (68-746)	1/4"	3/8 (10)	4.4 (125)	7-3/8 (186)	4.74 (2.15)
WX-43-4134L	8,000	1/2 (13)	820 (1,112)	50-580 (68-786)	1/4"	3/8 (10)	4 (113)	9-1/2 (239)	4.47 (2.03)

Impact Wrenches



WX-43-4031P3

1/2" Impact Wrench

- Composite Motor Housing
- Pin Clutch Mechanism
- Lightweight
- Light Weight
- Low Noise 83 dB (A)
- Push Button One Hand Forward / Reverse



Composite

WX-43-4033P2

1/2" Impact Wrench

- Composite Motor Housing
- Twin Hammer
- Handle Exhaust



WX-43-4019A

1/2" Impact Wrench

- Composite Motor Housing
- Twin Hammer
- Handle Exhaust
- Lightweight
- Low Noise



Torque Controlled

WX-43-4033A

1/2" Impact Wrench

- Composite Motor Housing
- Twin Hammer
- Handle Exhaust
- Lightweight
- Low Noise 83 dB (A)



WX-43-4039A

1/2" Impact Wrench

- Composite Motor Housing
- Twin Hammer
- Lightweight
- Low Noise



Model No.	Free Speed (RPM)	Anvil Size Inch (mm)	Maximum Torque Ft-lbs (Nm)	Working Torque Range Ft-lbs (Nm)	Air Inlet (NPT)	Hose Size ID Inch (mm)	Average Air Consumption CFN (L/Min)	Length Inch (mm)	Weight Lbs (Kg)
WX-43-4031P3	7,000	1/2 (13)	680 (922)	50-550 (68-746)	1/4"	3/8 (10)	4.4 (125)	8 (204)	4.8 (2.2)
WX-43-4033P2	7,000	1/2 (13)	1,000 (1,375)	50-650 (68-882)	1/4"	3/8 (10)	4 (113)	7-3/16 (183)	4 (1.9)
WX-43-4019A	7,500/ 12,000	1/2 (13)	460 (624)	66-96 (90-130)	1/4"	3/8 (10)	4 (113)	6 (153)	2.6 (1.2)
WX-43-4033A	3,500/ 8,000	1/2 (13)	820 (1,112)	66-96 (90-130)	1/4"	3/8 (10)	4 (113)	7-3/16 (183)	4 (1.9)
WX-43-4039A	3,500/ 8,000	1/2 (13)	820 (1,112)	66-96 (90-130)	1/4"	3/8 (10)	4 (113)	7-3/16 (183)	4 (1.9)

Impact Wrenches



WX-45-4051P

3/4" Impact Wrench

- Twin Hammer
- Composite Motor Housing
- Push Button One Hand Forward / Reverse
- Low Noise 90 dB (A)
- Light Weight



Accessories
(Optional)
Rubber Boot



WX-45-4057G

3/4" Impact Wrench

- Twin Hammer
- Handle Exhaust
- Built-in Comfort Grip



WX-45-4054P

3/4" Impact Wrench

- Twin Hammer
- Composite Motor Housing
- Push Button One Hand Forward / Reverse
- Low Noise 83 dB (A)
- Light Weight



Accessories
(Optional)
Rubber Boot

Model No.	Free Speed (RPM)	Anvil Size Inch (mm)	Maximum Torque Ft-lbs (Nm)	Working Torque Range Ft-lbs (Nm)	Air Inlet (NPT)	Hose Size ID Inch (mm)	Average Air Consumption CFN (L/Min)	Length Inch (mm)	Weight Lbs (Kg)
WX-45-4051P	5,500	3/4 (19)	1,500 (2,034)	200-1,200(271-1,627)	3/8"	1/2 (13)	7 (198)	8-1/2 (215)	7.5 (3.4)
WX-45-4054P	5,500	3/4 (19)	1,500 (2,034)	200-1,200(271-1,627)	3/8"	1/2 (13)	7 (198)	8-1/2 (215)	7.3 (3.3)
WX-45-4057G	5,500	3/4 (19)	1,500 (2,034)	200-1,300(271-1,763)	3/8"	1/2 (13)	7 (198)	8-3/4 (220)	10.1 (4.6)

Impact Wrenches



WX-45-4153P

3/4" Impact Wrench

- Twin Hammer
- Composite Motor Housing
- Forward : 3 Different Speeds
- Reverse : Full Power



WX-45-4151P

3/4" Impact Wrench

- Twin Hammer
- Composite Motor Housing
- Forward : 3 Different Speeds
- Reverse : Full Power



WX-45-4059P

3/4" Impact Wrench

- Twin Hammer
- Composite Motor Housing
- Light Weight
- Low Noise 90 dB (A)



WX-45-4154P

3/4" Impact Wrench

- Twin Hammer
- Composite Motor Housing
- Variable Speed Trigger

Composite

Model No.	Free Speed (RPM)	Anvil Size Inch (mm)	Maximum Torque Ft-lbs (Nm)	Working Torque Range Ft-lbs (Nm)	Air Inlet (NPT)	Hose Size ID Inch (mm)	Average Air Consumption CFN (L/Min)	Length Inch (mm)	Weight Lbs (Kg)
WX-45-4059P	5,500	3/4 (19)	1,500 (2,034)	200-900 (271-1,224)	3/8"	1/2 (13)	7 (198)	8-1/2 (215)	7.5 (3.4)
WX-45-4151P	5,500	3/4 (19)	1,500 (2,034)	200-1,200 (271-1,627)	3/8"	1/2 (13)	7 (198)	8-3/4 (220)	8.77 (3.98)
WX-45-4153P	5,500	3/4 (19)	1,500 (2,034)	200-1,200 (271-1,627)	3/8"	1/2 (13)	7 (198)	8-3/4 (220)	8.35 (3.79)
WX-45-4154P	5,500	3/4 (19)	1,500 (2,034)	200-1,200 (271-1,627)	3/8"	1/2 (13)	7 (198)	8-3/4 (220)	7.59 (3.44)

Impact Wrenches



WX-0740
3/4" Impact Wrench
- *Single Hammer*
WX-0740L
3/4" Impact Wrench
- *with 6" Ext. Anvil*



WX-0751
3/4" Impact Wrench
- *Pin Clutch*
WX-0751L
3/4" Impact Wrench
- *with 6" Ext. Anvil*



WX-0750
3/4" Impact Wrench
- *Pin Clutch*
WX-0750L
3/4" Impact Wrench
- *with 6" Ext. Anvil*

Model No.	Free Speed (RPM)	Anvil Size Inch (mm)	Maximum Torque Ft-lbs (Nm)	Bolt Capacity	Air Inlet (NPT)	Hose Size ID Inch (mm)	Average Air Consumption CFN (L/Min)	Length Inch (mm)	Weight Lbs (Kg)
WX-0740	4,500	3/4 (19)	500 (675)	7/8"	1/4"	3/8 (10)	7 (198)	9-1/2 (241)	10.6 (4.8)
WX-0750	4,200	3/4 (19)	700 (945)	1"	1/4"	3/8 (10)	7 (198)	9-1/2 (241)	10.6 (4.8)
WX-0751	4,200	3/4 (19)	700 (945)	1"	1/4"	3/8 (10)	7 (198)	9-3/4 (248)	10.6 (4.8)
WX-0740L	4,500	3/4 (19)	500 (675)	7/8"	1/4"	3/8 (10)	7 (198)	15-1/2 (394)	11.6 (5.3)
WX-0750L	4,200	3/4 (19)	700 (945)	1"	1/4"	3/8 (10)	7 (198)	15-1/2 (394)	11.6 (5.3)
WX-0751L	4,200	3/4 (19)	700 (945)	1"	1/4"	3/8 (10)	7 (198)	15-3/4 (400)	11.6 (5.3)

Impact Wrenches



WX-45-4059A

3/4" Impact Wrench

- Twin Hammer
- Composite Motor Housing
- Lightweight
- Low Noise

Torque Controlled



WX-45-4051A

3/4" Impact Wrench

- Twin Hammer
- Composite Motor Housing
- Lightweight
- Low Noise



WX-45-4059PL

3/4" Impact Wrench

- with 6" Ext. Anvil
- Twin Hammer
- Composite Motor Housing
- Light Weight
- Low Noise 90 dB (A)

Composite



WX-45-4051PL

3/4" Impact Wrench

- with 6" Ext. Anvil
- Twin Hammer
- Composite Motor Housing
- Lightweight
- Low Noise 90 dB (A)

Model No.	Free Speed (RPM)	Anvil Size Inch (mm)	Maximum Torque Ft-lbs (Nm)	Working Torque Range Ft-lbs (Nm)	Air Inlet (NPT)	Hose Size ID Inch (mm)	Average Air Consumption CFN (L/Min)	Length Inch (mm)	Weight Lbs (Kg)
WX-45-4059A	3,000/6,000	3/4 (19)	1,500 (2,034)	332-443 (450-600)	3/8"	1/2 (13)	7 (198)	8-1/2 (215)	7.5 (3.4)
WX-45-4051A	3,000/6,000	3/4 (19)	1,500 (2,034)	332-443 (450-600)	3/8"	1/2 (13)	7 (198)	8-1/2 (215)	8.77 (3.98)
WX-45-4051PL	5,500	3/4 (19)	1,500 (2,034)	200-1,200 (271-1,627)	3/8"	1/2 (13)	7 (198)	14-1/2 (368)	8.8 (4.0)
WX-45-4059PL	5,500	3/4 (19)	1,500 (2,034)	200-900 (271-1,224)	3/8"	1/2 (13)	7 (198)	14-1/2 (368)	8.8 (4.0)

Impact Wrenches



Features :

- Twin Hammer / Pin Clutch
- Handle Exhaust

WX-45-4054PL

3/4" Impact Wrench

- with 6" Ext. Anvil
- Composite Motor Housing



Accessories
(Optional)
Rubber Boot

WX-45-4057LG

3/4" Impact Wrench

- with 6" Ext. Anvil

WX-47-4057LG

1" Impact Wrench

- with 6" Ext. Anvil



Model No.	Free Speed (RPM)	Anvil Size Inch (mm)	Maximum Torque Ft-lbs (Nm)	Working Torque Range Ft-lbs (Nm)	Air Inlet (NPT)	Hose Size ID Inch (mm)	Average Air Consumption CFN (L/Min)	Length Inch (mm)	Weight Lbs (Kg)
WX-45-4057LG	5,500	3/4 (19)	1,500 (2,034)	200-1,300 (251-1,763)	3/8"	1/2 (13)	7 (198)	14-3/4 (373)	12.1 (5.5)
WX-45-4054PL	5,500	3/4 (19)	1,500 (2,034)	200-1,200 (251-1,627)	3/8"	1/2 (13)	7 (198)	14-1/2 (368)	8.6 (3.9)
WX-47-4057LG	5,500	1 (25.4)	1,500 (2,034)	200-1,300 (251-1,763)	3/8"	1/2 (13)	7 (198)	15 (381)	13 (5.9)

Impact Wrenches



Features :

- 1" Heavy Duty
- Twin Hammer Clutch Mechanism
- Adjustable Side Handle
- Handle Exhaust
- 3 Position Power Setting in Forward and Reverse

Features :

- Built-in Comfort Grip
- Twin Hammer Clutch Mechanism
- Handle Exhaust (Silencer)

WX-47-4075
1" Impact Wrench



3 Position Power Setting
in Forward and Reverse

WX-47-4057G
1" Impact Wrench



Impact Wrenches

Model No.	Free Speed (RPM)	Anvil Size Inch (mm)	Maximum Torque Ft-lbs (Nm)	Working Torque Range Ft-lbs (Nm)	Air Inlet (NPT)	Hose Size ID Inch (mm)	Average Air Consumption CFN (L/Min)	Length Inch (mm)	Weight Lbs (Kg)
WX-47-4057G	5,500	1 (25.4)	1,500 (2,034)	200-1,300 (271-1,763)	3/8"	1/2 (13)	7 (198)	8-7/8 (228)	11 (5)
WX-47-4075	5,000	1 (25.4)	2,500 (3,390)	360-1,600 (488-2,169)	1/2"	1/2 (13)	10 (282)	11-7/16 (290)	21.8 (9.9)

Impact Wrenches



WX-47-4153P

1" Impact Wrench

- Twin Hammer
- Composite Motor Housing
- Reverse : Full Power
- Forward : 3 Different Speeds



WX-0709S

1" Impact Wrench

- Rocking Dog



WX-47-4074

1" Impact Wrench

- Twin Hammer Clutch Mechanism
- Adjustable Side Handle
- 3 Position Power Setting in Forward and Reverse
- Handle Exhaust

Model No.	Free Speed (RPM)	Anvil Size Inch (mm)	Maximum Torque Ft-lbs (Nm)	Working Torque Range Ft-lbs (Nm)	Air Inlet (NPT)	Hose Size ID Inch (mm)	Average Air Consumption CFN (L/Min)	Length Inch (mm)	Weight Lbs (Kg)
WX-0709S	3,500	1 (25.4)	1,200 (1,620)		1/2"	1/2 (13)	12 (340)	11-1/8 (282)	20.5 (9.3)
WX-47-4074	6,000	1 (25.4)	1,800 (2,441)	220-1,450 (300-1,965)	1/2"	1/2 (13)	10 (282)	9-3/4 (247)	13.9 (6.3)
WX-47-4153P	5,500	1 (25.4)	1,500 (2,034)	200-1,200 (271-1,627)	3/8"	1/2 (13)	7 (198)	9 (229)	8.55 (3.88)

Impact Wrenches



WX-47-4051P

1" Impact Wrench

- Twin Hammer Clutch Mechanism
- Composite Motor Housing
- Push Button One Hand Forward / Reverse
- Light Weight
- Low Noise 90 dB (A)



Accessories
(Optional)
Rubber Boot



WX-47-4059P

1" Impact Wrench

- Twin Hammer Clutch Mechanism
- Composite Motor Housing
- Push Button One Hand Forward / Reverse
- Light Weight
- Low Noise 90 dB (A)



WX-47-4054P

1" Impact Wrench

- Twin Hammer Clutch Mechanism
- Composite Motor Housing
- Push Button One Hand Forward / Reverse
- Light Weight
- Low Noise 83 dB (A)



Accessories
(Optional)
Rubber Boot

Model No.	Free Speed (RPM)	Anvil Size Inch (mm)	Maximum Torque Ft-lbs (Nm)	Working Torque Range Ft-lbs (Nm)	Air Inlet (NPT)	Hose Size ID Inch (mm)	Average Air Consumption CFN (L/Min)	Length Inch (mm)	Weight Lbs (Kg)
WX-47-4051P	5,500	1 (25.4)	1,500 (2,034)	220-1,200 (271-1,627)	3/8"	1/2 (13)	7 (198)	8-3/4 (223)	7.7 (3.5)
WX-47-4054P	5,500	1 (25.4)	1,500 (2,034)	220-1,200 (271-1,627)	3/8"	1/2 (13)	7 (198)	8-3/4 (223)	7.5 (3.4)
WX-47-4059P	5,500	1 (25.4)	1,500 (2,034)	200-900 (271-1,224)	3/8"	1/2 (13)	7 (198)	8-3/4 (223)	7.7 (3.5)

Impact Wrenches



WX-0706S

1" Impact Wrench

- Twin Hammer Clutch Mechanism
- with 2" Ext. Anvil

WX-0706L

1" Impact Wrench

- Twin Hammer Clutch Mechanism
- with 6" Ext. Anvil



WX-0707S

1" Impact Wrench

- Rocking Dog
- with 2" Ext. Anvil

WX-0707L

1" Impact Wrench

- Rocking Dog
- with 6" Ext. Anvil



WX-47-4151P

1" Impact Wrench

- Twin Hammer Clutch Mechanism
- Composite Motor Housing
- Reverse : Full Power
- Forward : 3 Different Speeds
- Handle Exhaust

Model No.	Free Speed (RPM)	Anvil Size Inch (mm)	Maximum Torque Ft-lbs (Nm)	Bolt Capacity	Air Inlet (NPT)	Hose Size ID Inch (mm)	Average Air Consumption CFN (L/Min)	Length Inch (mm)	Weight Lbs (Kg)
WX-0706S	3,500	1 (25.4)	1,800 (2,430)	1-3/4"	1/2"	1/2 (13)	12 (340)	11-7/8 (302)	19.8 (9)
WX-0707S	3,500	1 (25.4)	1,200 (1,620)	1-1/2"	1/2"	1/2 (13)	12 (340)	11-7/8 (302)	24.25 (11)
WX-47-4151P	5,500	1 (25.4)	1,500 (2,034)		3/8"	1/2 (13)	7 (198)	9 (229)	9.01 (4.09)
WX-0706L	3,500	1 (25.4)	1,800 (2,430)	1-3/4"	1/2"	1/2 (13)	12 (340)	16-7/8 (429)	22.2 (10)
WX-0707L	3,500	1 (25.4)	1,200 (1,620)	1-1/2"	1/2"	1/2 (13)	12 (340)	22-7/8 (581)	28.4 (13)

Impact Wrenches



WX-47-4075L6

1" Impact Wrench

- Twin Hammer Clutch Mechanism
- Adjustable Side Handle
- 3 Position Power Setting in Forward and Reverse
- Handle Exhaust
- Anvil Length : 6.3" (160 mm)



WX-47-4074L7

1" Impact Wrench

- Twin Hammer Clutch Mechanism
- Adjustable Side Handle
- 3 Position Power Setting in Forward and Reverse
- Handle Exhaust
- Anvil Length : 7.3" (185 mm)



3 Position Power Setting in Forward and Reverse



WX-47-4075L8

1" Impact Wrench

- Twin Hammer Clutch Mechanism
- Adjustable Side Handle
- 3 Position Power Setting in Forward and Reverse
- Handle Exhaust
- Anvil Length : 8.3" (210 mm)



WX-47-4074L8

1" Impact Wrench

- Twin Hammer Clutch Mechanism
- Adjustable Side Handle
- 3 Position Power Setting in Forward and Reverse
- Handle Exhaust
- Anvil Length : 8.3" (210 mm)

Model No.	Free Speed (RPM)	Anvil Size Inch (mm)	Maximum Torque Ft-lbs (Nm)	Working Torque Range Ft-lbs (Nm)	Air Inlet (NPT)	Hose Size ID Inch (mm)	Average Air Consumption CFN (L/Min)	Length Inch (mm)	Weight Lbs (Kg)
WX-47-4074L7	6,000	1 (25.4)	1,800 (2,430)	220-1,450 (300-1,965)	1/2"	1/2 (13)	10 (282)	15-3/8 (390)	15.7 (7.1)
WX-47-4074L8	6,000	1 (25.4)	1,800 (2,430)	220-1,450 (300-1,965)	1/2"	1/2 (13)	10 (282)	16-5/16 (415)	16.1 (7.3)
WX-47-4075L6	5,000	1 (25.4)	2,500 (3,390)	360-1,600 (488-2,169)	1/2"	1/2 (13)	10 (282)	15-3/8 (390)	23.6 (10.7)
WX-47-4075L8	5,000	1 (25.4)	2,500 (3,390)	360-1,600 (488-2,169)	1/2"	1/2 (13)	10 (282)	17-3/8 (442)	24.5 (11.1)

Impact Wrenches



- WX-47-4059PL**
1" Impact Wrench
- Composite Motor Housing
 - Twin Hammer
 - Handle Exhaust
 - Light Weight
 - Low Noise 90 dB (A)
 - Push Button One Hand Forward / Reverse
 - With 6" Ext. Anvil

Composite



- WX-47-4051PL**
1" Impact Wrench
- Composite Motor Housing
 - Twin Hammer
 - Handle Exhaust
 - Push Button One Hand Forward / Reverse
 - Light Weight
 - Low Noise 90 dB (A)
 - With 6" Ext. Anvil



- WX-47-4151PL**
1" Impact Wrench
- Composite Motor Housing
 - Twin Hammer
 - Handle Exhaust (Silencer)
 - Reverse : Full Power
 - Forward : 3 Different Speeds
 - With 6" Ext. Anvil



- WX-47-4054PL**
1" Impact Wrench
- Composite Motor Housing
 - Twin Hammer
 - Handle Exhaust
 - Light Weight
 - Low Noise 83 dB (A)
 - Push Button One Hand Forward / Reverse
 - With 6" Ext. Anvil



- WX-47-4154L**
1" Impact Wrench
- Composite Motor Housing
 - Twin Hammer
 - With Handle Grip
 - With 6" Ext. Anvil

Model No.	Free Speed (RPM)	Anvil Size Inch (mm)	Maximum Torque Ft-lbs (Nm)	Working Torque Range Ft-lbs (Nm)	Air Inlet (NPT)	Hose Size ID Inch (mm)	Average Air Consumption CFN (L/Min)	Length Inch (mm)	Weight Lbs (Kg)
WX-47-4051PL	5,500	1 (25.4)	1,500 (2,034)	200-1,200 (271-1,627)	3/8"	1/2 (13)	7 (198)	14-7/8 (376)	9.7 (4.4)
WX-47-4054PL	5,500	1 (25.4)	1,500 (2,034)	200-1,200 (271-1,627)	3/8"	1/2 (13)	7 (198)	14-1/2 (368)	9.5 (4.3)
WX-47-4059PL	5,500	1 (25.4)	1,500 (2,034)	200-900 (271-1,224)	3/8"	1/2 (13)	7 (198)	14-1/2 (368)	9.7 (4.4)
WX-47-4151PL	5,500	1 (25.4)	1,500 (2,034)	200-1,200 (271-1,627)	3/8"	1/2 (13)	7 (198)	15 (381)	10.95 (4.97)
WX-47-4154L	5,500	1 (25.4)	1,500 (2,034)	200-1,200 (271-1,627)	3/8"	1/2 (13)	7 (198)	15 (381)	9.74 (4.42)

Impact Wrenches



Features :

- Pinless Clutch Mechanism
- Side Support Handle for Better Control When Operate
- Handle with Inside Trigger
- With Steel Ring to Retain the Sockets



WX-47-4071
1" Heavy Duty Impact Wrench
- Pinless Clutch



WX-47-4071L7
1" Heavy Duty Impact Wrench
- Pinless Clutch
- Anvil Length : 7.6" (193 mm)
WX-47-4071L9
1" Heavy Duty Impact Wrench
- Pinless Clutch
- Anvil Length : 9.6" (245 mm)

Model No.	Free Speed (RPM)	Anvil Size Inch (mm)	Maximum Torque Ft-lbs (Nm)	Working Torque Range Ft-lbs (Nm)	Air Inlet (NPT)	Hose Size ID Inch (mm)	Average Air Consumption CFN (L/Min)	Length Inch (mm)	Weight Lbs (Kg)
WX-47-4071	5,000	1 (25.4)	2,200 (2,983)	400-1,650 (542-2,237)	1/2"	1/2 (13)	10 (282)	14 (346)	23.3 (10.56)
WX-47-4071L7	5,000	1 (25.4)	2,200 (2,983)	400-1,650 (542-2,237)	1/2"	1/2 (13)	10 (282)	20 (497)	26.2 (11.9)
WX-47-4071L9	5,000	1 (25.4)	2,200 (2,983)	400-1,650 (542-2,237)	1/2"	1/2 (13)	10 (282)	22 (548)	26.9 (12.2)

Impact Wrenches



Features :

- *Twin Hammer Clutch Mechanism*
- *Side Support Handle for Better Control When Operate*
- *Handle with Inside Trigger*
- *With Steel Ring to Retain the Sockets*



WX-47-4072

1" Heavy Duty Impact Wrench

- *Twin Hammer Clutch*



WX-47-4072L6

1" Heavy Duty Impact Wrench

- *Twin Hammer Clutch*

- *Anvil Length : 6.3" (159 mm)*

WX-47-4072L8

1" Heavy Duty Impact Wrench

- *Twin Hammer Clutch*

- *Anvil Length : 8.3" (210 mm)*

Model No.	Free Speed (RPM)	Anvil Size Inch (mm)	Maximum Torque Ft-lbs (Nm)	Working Torque Range Ft-lbs (Nm)	Air Inlet (NPT)	Hose Size ID Inch (mm)	Average Air Consumption CFN (L/Min)	Length Inch (mm)	Weight Lbs (Kg)
WX-47-4072	5,000	1 (25.4)	2,200 (2,983)	400-1,650 (542-2,237)	1/2"	1/2 (13)	10 (282)	16.2 (412)	22 (10)
WX-47-4072L6	5,000	1 (25.4)	2,200 (2,983)	400-1,650 (542-2,237)	1/2"	1/2 (13)	10 (282)	20-1/4 (514)	24 (10.9)
WX-47-4072L8	5,000	1 (25.4)	2,200 (2,983)	400-1,650 (542-2,237)	1/2"	1/2 (13)	10 (282)	20-3/4 (527)	24.3 (11)

Impact Wrenches



Features :

- **Twin Hammer Clutch Mechanism**
- **Side Support Handle for Better Control When Operate**
- **Bended Handle With Inside Trigger**
- **With Steel Ring to Retain the Sockets**



► Safe Twist Handle Design

WX-47-4073

1" Impact Wrench

- **Twin Hammer Clutch**



WX-47-4073L7

1" Impact Wrench

- **Twin Hammer Clutch**
- **Anvil Length : 7.1" (180 mm)**

WX-47-4073L8

1" Impact Wrench

- **Twin Hammer Clutch**
- **Anvil Length : 8.3" (210 mm)**



WX-47-4073L7Q (Lower Noise)

1" Impact Wrench

- **Twin Hammer Clutch**
- **Anvil Length : 7.1" (180 mm)**

WX-47-4073L8Q (Lower Noise)

1" Impact Wrench

- **Twin Hammer Clutch**
- **Anvil Length : 8.3" (210 mm)**

Model No.	Free Speed (RPM)	Anvil Size Inch (mm)	Maximum Torque Ft-lbs (Nm)	Working Torque Range Ft-lbs (Nm)	Air Inlet (NPT)	Hose Size ID Inch (mm)	Average Air Consumption CFN (L/Min)	Length Inch (mm)	Weight Lbs (Kg)	Noise Level dB (A)
WX-47-4073	6,000	1 (25.4)	1,800 (2,441)	200-1,500 (271-2,033)	1/2"	1/2 (13)	10 (282)	12-3/4 (324)	14.3 (6.5)	96
WX-47-4073L7	6,000	1 (25.4)	1,800 (2,441)	200-1,500 (271-2,033)	1/2"	1/2 (13)	10 (282)	18-3/8 (466)	16.1 (7.3)	96
WX-47-4073L8	6,000	1 (25.4)	1,800 (2,441)	200-1,500 (271-2,033)	1/2"	1/2 (13)	10 (282)	19-3/8 (492)	16.5 (7.5)	96
WX-47-4073L7Q	6,000	1 (25.4)	1,800 (2,441)	200-1,500 (271-2,033)	1/2"	1/2 (13)	10 (282)	18-3/8 (466)	16.1 (7.3)	89
WX-47-4073L8Q	6,000	1 (25.4)	1,800 (2,441)	200-1,500 (271-2,033)	1/2"	1/2 (13)	10 (282)	19-3/8 (492)	16.5 (7.5)	89

Impact Wrenches



Features :

- Twin Hammer Clutch Mechanism
- Side Support Handle for Better Control When Operate
- Bended Handle With Inside Trigger
- With Steel Ring to Retain the Sockets



WX-47-4076

1" Impact Wrench

- Twin Hammer Clutch



WX-47-4076L7

1" Impact Wrench

- Twin Hammer Clutch
- Anvil Length : 7.3" (185 mm)



WX-47-4076L8

1" Impact Wrench

- Twin Hammer Clutch
- Anvil Length : 8.3" (210 mm)

Model No.	Free Speed (RPM)	Anvil Size Inch (mm)	Maximum Torque Ft-lbs (Nm)	Working Torque Range Ft-lbs (Nm)	Air Inlet (NPT)	Hose Size ID Inch (mm)	Average Air Consumption CFN (L/Min)	Length Inch (mm)	Weight Lbs (Kg)
WX-47-4076	6,000	1 (25.4)	1,800 (2,441)	220-1,450 (300-1,965)	1/2"	1/2 (13)	10 (282)	14-7/8 (378)	13.9 (6.3)
WX-47-4076L7	6,000	1 (25.4)	1,800 (2,441)	220-1,450 (300-1,965)	1/2"	1/2 (13)	10 (282)	20-9/16 (522)	15.7 (7.1)
WX-47-4076L8	6,000	1 (25.4)	1,800 (2,441)	220-1,450 (300-1,965)	1/2"	1/2 (13)	10 (282)	21-9/16 (547)	15.9 (7.2)

Impact Wrenches



WX-0708S

1" Impact Wrench

- With 2" Ext. Anvil
- Rocking Dog

WX-0708L

1" Impact Wrench

- With 6" Ext. Anvil
- Rocking Dog



WX-0704L

1" Impact Wrench

- Twin Hammer
- With 6" Ext. Anvil

WX-0704S

1" Impact Wrench

- Twin Hammer
- With 2" Ext. Anvil



WX-0705L


1" Impact Wrench

- Rocking Dog
- With 6" Ext. Anvil

WX-0705S

1" Impact Wrench

- Rocking Dog
- With 2" Ext. Anvil

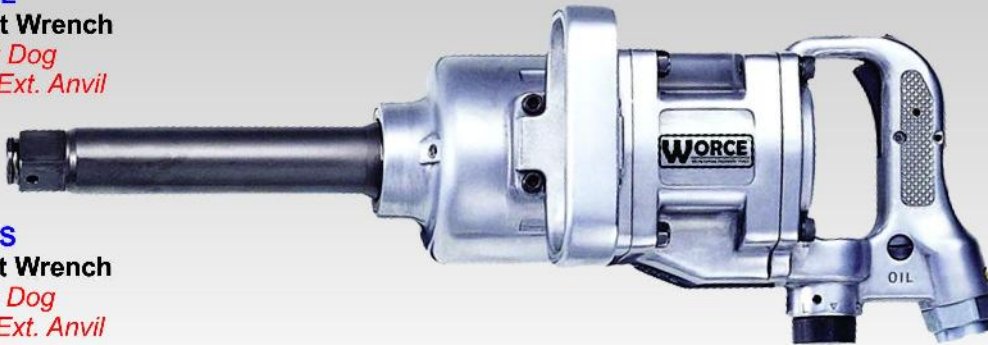

Model No.	Free Speed (RPM)	Anvil Size Inch (mm)	Bolt Capacity	Maximum Torque Ft-lbs (Nm)	Air Inlet (NPT)	Hose Size ID Inch (mm)	Average Air Consumption CFN (L/Min)	Length Inch (mm)	Weight Lbs (Kg)
WX-0708L	4,000	1 (25.4)	1-1/4"	1,200 (1,620)	1/2"	1/2 (13)	12 (340)	19-7/32 (488)	23.5 (10.7)
WX-0704L	3,500	1 (25.4)	1-3/4"	1,800 (2,430)	1/2"	1/2 (13)	12 (340)	22-7/8 (581)	24.2 (11)
WX-0705L	3,500	1 (25.4)	1-1/2"	1,200 (1,620)	1/2"	1/2 (13)	12 (340)	16-7/8 (429)	27.1 (12.3)
WX-0708S	4,000	1 (25.4)	1-1/4"	1,200 (1,620)	1/2"	1/2 (13)	12 (340)	14-7/32 (361)	22.5 (10)
WX-0704S	3,500	1 (25.4)	1-3/4"	1,800 (2,430)	1/2"	1/2 (13)	12 (340)	17 (432)	24.25 (11.1)
WX-0705S	3,500	1 (25.4)	1-1/2"	1,200 (1,620)	1/2"	1/2 (13)	12 (340)	11-7/8 (302)	26.6 (12)

Impact Wrenches



WX-9223

1-1/2" Impact Wrench

- Twin Hammer Mechanism
- 4 Pieces Parts Mechanism
- Easy to do the Maintenance
- Break Loose a Frozen for Rusted Bolt Easily



WX-9223-6

1-1/2" Impact Wrench

- Twin Hammer Mechanism
- 4 Pieces Parts Mechanism
- Easy to do the Maintenance
- Break Loose a Frozen for Rusted Bolt Easily



WX-9223-9

1-1/2" Impact Wrench

- Twin Hammer Mechanism
- 4 Pieces Parts Mechanism
- Easy to do the Maintenance
- Break Loose a Frozen for Rusted Bolt Easily



Model No.	Free Speed (RPM)	Anvil Size Inch	Maximum Torque Ft-lbs (Nm)	Working Torque Range Ft-lbs (Nm)	Air Pressure PSI (bar)	Hose Size ID Inch	Average Air Consumption CFN (L/Min)	Length Inch (mm)	Weight Kg
WX-9223	3,000	1-1/2	4,478 (3500)	200-3000 (271-4065)	90 (603)	3/4	16 (453)	17-3/4" (450)	19.7
WX-9223-6	3,000	1-1/2	4,478 (3500)	200-3000 (271-4065)	90 (603)	3/4	16 (453)	21-3/4" (551)	21.7
WX-9223-9	3,000	1-1/2	4,478 (3500)	200-3000 (271-4065)	90 (603)	3/4	16 (453)	24-3/4" (627)	23.7

Impact Wrenches



WX-43-4033PK

1/2" Impact Wrench

- 1 pc Impact Wrench*
- 3 pcs Standard Sockets Set*
- 3 pcs Deep Sockets Set*
- 1 pc Blow Molded Case*



WX-43-4033PK3

1/2" Impact Wrench

- 1 pc Impact Wrench*
- 10 pcs Sockets Set*
- 1 pc Extension Bar*
- 1 pc Universal Joint*
- 1 pc Nipple*
- 1 pc Blow Molded Case*



WX-43-231HRGK3

1/2" Impact Wrench

- 1 pc Impact Wrench*
- 10 pcs Sockets*
- 1 pc Extension Bar*
- 1 pc Universal Joint*
- 1 pc Nipple*
- 1 pc Blow Molded Case*



WX-403K-17

1/2" Impact Wrench

- 1 pc Impact Wrench*
- 10 pcs Sockets*
- 1 pc Extension Bar*
- 1 pc Oil Pot*
- 1 pc Mini Oiler*
- 1 pc Hex. Wrench*
- 1 pc Nipple*
- 1 pc Blow Case*



WX-43-4033PK2

1/2" Impact Wrench

- 1 pc Impact Wrench*
- 1 pc Reversible Ratchet*
- 3 pcs 6 Point 1/2" Deep Sockets Set*
- 16 pcs 6 Point 1/2" Sockets Set*
- 1 pc Nipple*
- 1 pc Blow Molded Case*



Take a Load Off Users Backs With Our Suspending Stands



Features :

Auto mechanic, tire shop workers and others who need to manipulate heavy objects will immediately recognize the value of this product. By suspending air tools and other items in midair, it protects users backs and saves their time and strength.



Model No.	Height Cm (mm)	Gross Weight Kg (Lbs)	Suspending Capacity Kg (Lbs)
WX-0915	168 (66)	29 (63)	9-15 (19-33)
WX-1522	168 (66)	29 (63)	15-22 (33-48)

WX-0915

Suspending Stand

- Capacity 9-15 Kgs

WX-1522

Suspending Stand

- Capacity 15-22 Kgs

Cable

- Swivel freely
- Vertical movement resistance is adjustable

Swing Arm
Swivel 45°

**Push / Pull
Handle**

Impact Wrench is not included.

Socket Holders

Spring Balancer Case

Storage Tray
For nuts & bolts

Suspending Stand