



Orbital Palm Sanders



WX-65-6033

5" Random Orbital Palm Sander

- Orbit Dia. 10 mm

WX-65-6833

5" Random Orbital Palm Sander

- Orbit Dia. 8 mm

WX-65-6133

5" Random Orbital Palm Sander

- Orbit Dia. 5 mm

WX-65-6233

6" Random Orbital Palm Sander

- Orbit Dia. 2.5 mm

WX-66-6033

6" Random Orbital Palm Sander

- Orbit Dia. 10 mm

WX-66-6833

6" Random Orbital Palm Sander

- Orbit Dia. 8 mm

WX-66-6133

6" Random Orbital Palm Sander

- Orbit Dia. 5 mm

WX-66-6233

6" Random Orbital Palm Sander

- Orbit Dia. 2.5 mm

Central-Vacuum



WX-65-5037

5" Random Orbital Palm Sander

- Orbit Dia. 10 mm - Oil-free

WX-65-5837

5" Random Orbital Palm Sander

- Orbit Dia. 8 mm - Oil-free

WX-65-5137

5" Random Orbital Palm Sander

- Orbit Dia. 5 mm - Oil-free

WX-65-5237

6" Random Orbital Palm Sander

- Orbit Dia. 2.5 mm - Oil-free

WX-66-5037

6" Random Orbital Palm Sander

- Orbit Dia. 10 mm - Oil-free

WX-66-5837

6" Random Orbital Palm Sander

- Orbit Dia. 8 mm - Oil-free

WX-66-5137

6" Random Orbital Palm Sander

- Orbit Dia. 5 mm - Oil-free

WX-66-5237

6" Random Orbital Palm Sander

- Orbit Dia. 2.5 mm - Oil-free

Central-Vacuum



Model No.	Max. Free Speed (RPM)	Air Inlet (NPT)	Hose Size Inch (mm)	Air Consumption CFM (L/Min)	Length Inch (mm)	Weight Lbs (Kg)	Orbit Diameter Inch (mm)	Pad Size Inch (mm)	Spindle Thread
WX-65-6033 WX-65-5037	12,000	1/4"	3/8 (10)	2 (57)	5-3/4 (145)	1.3 (0.6)	3/8 (10)	5 (125)	5/16"-24
WX-65-6833 WX-65-5837	12,000	1/4"	3/8 (10)	2 (57)	5-3/4 (145)	1.3 (0.6)	5/16 (8)	5 (125)	5/16"-24
WX-65-6133 WX-65-5137	12,000	1/4"	3/8 (10)	2 (57)	5-3/4 (145)	1.3 (0.6)	3/16 (5)	5 (125)	5/16"-24
WX-65-6233 WX-65-5237	12,000	1/4"	3/8 (10)	2 (57)	5-3/4 (145)	1.3 (0.6)	3/32 (2.5)	5 (125)	5/16"-24
WX-66-6033 WX-66-5037	12,000	1/4"	3/8 (10)	2 (57)	5-3/4 (145)	1.3 (0.6)	3/8 (10)	6 (150)	5/16"-24
WX-66-6833 WX-66-5837	12,000	1/4"	3/8 (10)	2 (57)	5-3/4 (145)	1.3 (0.6)	5/16 (8)	6 (150)	5/16"-24
WX-66-6133 WX-66-5137	12,000	1/4"	3/8 (10)	2 (57)	5-3/4 (145)	1.3 (0.6)	3/16 (5)	6 (150)	5/16"-24
WX-66-6233 WX-66-5237	12,000	1/4"	3/8 (10)	2 (57)	5-3/4 (145)	1.3 (0.6)	3/32 (2.5)	6 (150)	5/16"-24

Orbital Palm Sanders



WX-65-6033C

5" Random Orbital Palm Sander

- Orbit Dia. 10 mm

WX-65-6833C

5" Random Orbital Palm Sander

- Orbit Dia. 8 mm

WX-65-6133C

5" Random Orbital Palm Sander

- Orbit Dia. 5 mm

WX-65-6233C

6" Random Orbital Palm Sander

- Orbit Dia. 2.5 mm

WX-66-6033C

6" Random Orbital Palm Sander

- Orbit Dia. 10 mm

WX-66-6833C

6" Random Orbital Palm Sander

- Orbit Dia. 8 mm

WX-66-6133C

6" Random Orbital Palm Sander

- Orbit Dia. 5 mm

WX-66-6233C

6" Random Orbital Palm Sander

- Orbit Dia. 2.5 mm



Central-Vacuum

WX-65-5037C

5" Random Orbital Palm Sander

- Orbit Dia. 10 mm - Oil-free

WX-65-5837C

5" Random Orbital Palm Sander

- Orbit Dia. 8 mm - Oil-free

WX-65-5137C

5" Random Orbital Palm Sander

- Orbit Dia. 5 mm - Oil-free

WX-65-5237C

6" Random Orbital Palm Sander

- Orbit Dia. 2.5 mm - Oil-free

WX-66-5037C

6" Random Orbital Palm Sander

- Orbit Dia. 10 mm - Oil-free

WX-66-5837C

6" Random Orbital Palm Sander

- Orbit Dia. 8 mm - Oil-free

WX-66-5137C

6" Random Orbital Palm Sander

- Orbit Dia. 5 mm - Oil-free

WX-66-5237C

6" Random Orbital Palm Sander

- Orbit Dia. 2.5 mm - Oil-free



Central-Vacuum

Model No.	Max. Free Speed (RPM)	Air Inlet (NPT)	Hose Size Inch (mm)	Air Consumption CFM (L/Min)	Length Inch (mm)	Weight Lbs (Kg)	Orbit Diameter Inch (mm)	Pad Size Inch (mm)	Spindle Thread
WX-65-6033C WX-65-5037C	12,000	1/4"	3/8 (10)	2 (57)	7-3/8 (187)	1.5 (0.7)	3/8 (10)	5 (125)	5/16"-24
WX-65-6833C WX-65-5837C	12,000	1/4"	3/8 (10)	2 (57)	7-3/8 (187)	1.5 (0.7)	5/16 (8)	5 (125)	5/16"-24
WX-65-6133C WX-65-5137C	12,000	1/4"	3/8 (10)	2 (57)	7-3/8 (187)	1.5 (0.7)	3/16 (5)	5 (125)	5/16"-24
WX-65-6233C WX-65-5237C	12,000	1/4"	3/8 (10)	2 (57)	7-3/8 (187)	1.5 (0.7)	3/32 (2.5)	5 (125)	5/16"-24
WX-66-6033C WX-66-5037C	12,000	1/4"	3/8 (10)	2 (57)	7-3/8 (187)	1.5 (0.7)	3/8 (10)	6 (150)	5/16"-24
WX-66-6833C WX-66-5837C	12,000	1/4"	3/8 (10)	2 (57)	7-3/8 (187)	1.5 (0.7)	5/16 (8)	6 (150)	5/16"-24
WX-66-6133C WX-66-5137C	12,000	1/4"	3/8 (10)	2 (57)	7-3/8 (187)	1.5 (0.7)	3/16 (5)	6 (150)	5/16"-24
WX-66-6233C WX-66-5237C	12,000	1/4"	3/8 (10)	2 (57)	7-3/8 (187)	1.5 (0.7)	3/32 (2.5)	6 (150)	5/16"-24

Orbital Palm Sanders



WX-65-6033A

5" Random Orbital Palm Sander

- Orbit Dia. 10 mm

WX-65-6833A

5" Random Orbital Palm Sander

- Orbit Dia. 8 mm

WX-65-6133A

5" Random Orbital Palm Sander

- Orbit Dia. 5 mm

WX-65-6233A

6" Random Orbital Palm Sander

- Orbit Dia. 2.5 mm

WX-66-6033A

6" Random Orbital Palm Sander

- Orbit Dia. 10 mm

WX-66-6833A

6" Random Orbital Palm Sander

- Orbit Dia. 8 mm

WX-66-6133A

6" Random Orbital Palm Sander

- Orbit Dia. 5 mm

WX-66-6233A

6" Random Orbital Palm Sander

- Orbit Dia. 2.5 mm

Self-Vacuum



WX-65-5037A

5" Random Orbital Palm Sander

- Orbit Dia. 10 mm - Oil-free

WX-65-5837A

5" Random Orbital Palm Sander

- Orbit Dia. 8 mm - Oil-free

WX-65-5137A

5" Random Orbital Palm Sander

- Orbit Dia. 5 mm - Oil-free

WX-65-5237A

6" Random Orbital Palm Sander

- Orbit Dia. 2.5 mm - Oil-free

WX-66-5037A

6" Random Orbital Palm Sander

- Orbit Dia. 10 mm - Oil-free

WX-66-5837A

6" Random Orbital Palm Sander

- Orbit Dia. 8 mm - Oil-free

WX-66-5137A

6" Random Orbital Palm Sander

- Orbit Dia. 5 mm - Oil-free

WX-66-5237A

6" Random Orbital Palm Sander

- Orbit Dia. 2.5 mm - Oil-free

Self-Vacuum



Model No.	Max. Free Speed (RPM)	Air Inlet (NPT)	Hose Size Inch (mm)	Air Consumption CFM (L/Min)	Length Inch (mm)	Weight Lbs (Kg)	Orbit Diameter Inch (mm)	Pad Size Inch (mm)	Spindle Thread
WX-65-6033A WX-65-5037A	12,000	1/4"	3/8 (10)	2 (57)	7-3/8 (187)	1.5 (0.7)	3/8 (10)	5 (125)	5/16"-24
WX-65-6833A WX-65-5837A	12,000	1/4"	3/8 (10)	2 (57)	7-3/8 (187)	1.5 (0.7)	5/16 (8)	5 (125)	5/16"-24
WX-65-6133A WX-65-5137A	12,000	1/4"	3/8 (10)	2 (57)	7-3/8 (187)	1.5 (0.7)	3/16 (5)	5 (125)	5/16"-24
WX-65-6233A WX-65-5237A	12,000	1/4"	3/8 (10)	2 (57)	7-3/8 (187)	1.5 (0.7)	3/32 (2.5)	5 (125)	5/16"-24
WX-66-6033A WX-66-5037A	12,000	1/4"	3/8 (10)	2 (57)	7-3/8 (187)	1.5 (0.7)	3/8 (10)	6 (150)	5/16"-24
WX-66-6833A WX-66-5837A	12,000	1/4"	3/8 (10)	2 (57)	7-3/8 (187)	1.5 (0.7)	5/16 (8)	6 (150)	5/16"-24
WX-66-6133A WX-66-5137A	12,000	1/4"	3/8 (10)	2 (57)	7-3/8 (187)	1.5 (0.7)	3/16 (5)	6 (150)	5/16"-24
WX-66-6233A WX-66-5237A	12,000	1/4"	3/8 (10)	2 (57)	7-3/8 (187)	1.5 (0.7)	3/32 (2.5)	6 (150)	5/16"-24

Orbital Palm Sanders

Orbital Palm Sanders



WX-65-6033B

5" Random Orbital Palm Sander

- Orbit Dia. 10 mm

WX-65-6833B

5" Random Orbital Palm Sander

- Orbit Dia. 8 mm

WX-65-6133B

5" Random Orbital Palm Sander

- Orbit Dia. 5 mm

WX-65-6233B

6" Random Orbital Palm Sander

- Orbit Dia. 2.5 mm

WX-66-6033B

6" Random Orbital Palm Sander

- Orbit Dia. 10 mm

WX-66-6833B

6" Random Orbital Palm Sander

- Orbit Dia. 8 mm

WX-66-6133B

6" Random Orbital Palm Sander

- Orbit Dia. 5 mm

WX-66-6233B

6" Random Orbital Palm Sander

- Orbit Dia. 2.5 mm

Self-Vacuum



Model No.	Max. Free Speed (RPM)	Air Inlet (NPT)	Hose Size Inch (mm)	Air Consumption CFM (L/Min)	Length Inch (mm)	Weight Lbs (Kg)	Orbit Diameter Inch (mm)	Pad Size Inch (mm)	Spindle Thread
WX-65-6033B	12,000	1/4"	3/8 (10)	2 (57)	7-3/4 (196)	1.5 (0.7)	3/8 (10)	5 (125)	5/16"-24
WX-65-6833B	12,000	1/4"	3/8 (10)	2 (57)	7-3/4 (196)	1.5 (0.7)	5/16 (8)	5 (125)	5/16"-24
WX-65-6133B	12,000	1/4"	3/8 (10)	2 (57)	7-3/4 (196)	1.5 (0.7)	3/16 (5)	5 (125)	5/16"-24
WX-65-6233B	12,000	1/4"	3/8 (10)	2 (57)	7-3/4 (196)	1.5 (0.7)	3/32 (2.5)	5 (125)	5/16"-24
WX-66-6033B	12,000	1/4"	3/8 (10)	2 (57)	7-3/4 (196)	1.5 (0.7)	3/8 (10)	6 (150)	5/16"-24
WX-66-6833B	12,000	1/4"	3/8 (10)	2 (57)	7-3/4 (196)	1.5 (0.7)	5/16 (8)	6 (150)	5/16"-24
WX-66-6133B	12,000	1/4"	3/8 (10)	2 (57)	7-3/4 (196)	1.5 (0.7)	3/16 (5)	6 (150)	5/16"-24
WX-66-6233B	12,000	1/4"	3/8 (10)	2 (57)	7-3/4 (196)	1.5 (0.7)	3/32 (2.5)	6 (150)	5/16"-24

Orbital Palm Sanders

Air Sanders



WX-60-5235

Nib Removal Sander

- Orbit Dia. 3 mm



WX-60-5236

Nib Removal Sander

- Orbit Dia. 3 mm



WX-61-6133

1-1/4" Mini Random Orbital Nib Sander



WX-603-5

5" Random Orbital Sander

- Orbit Dia. 5mm



WX-603V-5

5" Random Orbital Sander

- Orbit Dia. 5 mm



Model No.	Max. Free Speed (RPM)	Air Inlet (NPT)	Hose Size Inch (mm)	Air Consumption CFM (L/Min)	Length Inch (mm)	Weight Lbs (Kg)	Orbit Diameter Inch (mm)	Pad Size Inch (mm)	Spindle Thread
WX-61-6133	8,000	1/4"	3/8 (10)	2 (57)	1-1/8 (131)	1.1 (0.5)	3/16 (5)	1-1/4 (32)	Locking Type
WX-60-5235	12,000	1/4"	3/8 (10)	1 (28.3)	7-7/8 (197)	1.1 (0.5)	1/8 (3)	1-1/4 (32)	—
WX-60-5236	12,000	1/4"	3/8 (10)	1 (28.3)	7-7/8 (197)	1.1 (0.5)	1/8 (3)	1-1/4 (32)	—
WX-603-5	10,000	1/4"	3/8 (10)	18 (457)	5-1/2 (140)	3 (1.4)	—	5"	5/16"-24
WX-603V-5	10,000	1/4"	3/8 (10)	18 (457)	5-1/4 (133)	3 (1.4)	—	5"	5/16"-24

Gear-Driven Sanders



WX-G3-6132
3" Gear Driven Sander / Polisher



WX-G3-5132
3" Gear Driven Sander / Polisher
- Oil Free



Accessories (Optional) :



WX-G4-6132
4" Gear Driven Sander / Polisher



WX-G4-5132
4" Gear Driven Sander / Polisher
- Oil Free



WX-G5-6132
5" Gear Driven Sander / Polisher



WX-G5-5132
5" Gear Driven Sander / Polisher
- Oil Free



Model No.	Max. Free Speed (RPM)	Air Inlet (NPT)	Hose Size Inch (mm)	Air Consumption CFM (L/Min)	Length Inch (mm)	Weight Lbs (Kg)	Orbit Diameter Inch (mm)	Pad Size Inch (mm)	Noise Level dB (A)
WX-G3-5132	1,300	1/4"	3/8 (10)	3 (85)	10 (252)	2.2 (1.0)	3/16 (5)	3 (75)	84
WX-G3-6132	1,300	1/4"	3/8 (10)	3 (85)	10 (252)	2.2 (1.0)	3/16 (5)	3 (75)	84
WX-G4-5132	1,300	1/4"	3/8 (10)	3 (85)	10 (252)	2.2 (1.0)	3/16 (5)	4 (100)	84
WX-G4-6132	1,300	1/4"	3/8 (10)	3 (85)	10 (252)	2.2 (1.0)	3/16 (5)	4 (100)	84
WX-G5-5132	1,300	1/4"	3/8 (10)	3 (85)	10 (252)	2.2 (1.0)	3/16 (5)	5 (125)	84
WX-G5-6132	1,300	1/4"	3/8 (10)	3 (85)	10 (252)	2.2 (1.0)	3/16 (5)	5 (125)	84

Gear-Driven Sanders



WX-66-6238A

6" Gear Driven Sander / Polisher
- 900 RPM



WX-65-6238

5" Gear Driven Sander / Polisher
- 900 RPM

WX-66-6238

6" Gear Driven Sander / Polisher
- 900 RPM



WX-68-6238A

8" Gear Driven Sander / Polisher
- 900 RPM



WX-68-6238

8" Gear Driven Sander / Polisher
- 900 RPM



Accessories (Optional) :



#6P-663636-11 #80 Grit
Compounding Pad - Velcro



#6P-663637-11 #70 Grit
Compounding Pad - Velcro



#6N-663131V-6
#6N-663131V-8
Polishing Pad - Velcro

For WX-66-6238A Only



#66-6138A42
6" Sanding Pad



#68-6138A42
8" Sanding Pad



3M
Sanding Paper

Model No.	Free Speed (RPM)	Orbit Diameter Inch (mm)	Pad Size Inch (mm)	Air Consumption CFM (L/Min)	Length Inch (mm)	Weight Lbs (Kg)	Air Inlet (NPT)	Hose Size ID Inch (mm)
WX-66-6238	900	3/16 (5)	6 (150)	3.5 (99)	11-3/4 (300)	4.2 (1.9)	1/4"	3/8 (10)
WX-66-6238A	900	3/16 (5)	6 (150)	3.5 (99)	11-3/4 (300)	4.2 (1.9)	1/4"	3/8 (10)
WX-68-6238	900	3/16 (5)	8 (203)	3.5 (99)	12-3/8 (315)	4.4 (2.0)	1/4"	3/8 (10)
WX-68-6238A	900	3/16 (5)	8 (203)	3.5 (99)	12-3/8 (315)	4.4 (2.0)	1/4"	3/8 (10)

Two Hand Sanders



WX-65-5132

5" Two Hand Sanders

- Orbit Dia. 5 mm

WX-66-5032

6" Two Hand Sanders

- Orbit Dia. 10 mm

WX-66-5132

6" Two Hand Sanders

- Orbit Dia. 5 mm



WX-65-5132A

5" Two Hand Sander

- Orbit Dia. 5 mm

WX-66-5032A

6" Two Hand Sander

- Orbit Dia. 10 mm

WX-66-5132A

6" Two Hand Sander

- Orbit Dia. 5 mm



WX-65-6132A

5" Two Hand Sander

- Orbit Dia. 10 mm

WX-66-6032A

6" Two Hand Sander

- Orbit Dia. 10 mm

WX-66-6132A

6" Two Hand Sander

- Orbit Dia. 5 mm



WX-65-6132

5" Two Hand Sander

- Orbit Dia. 5 mm

WX-66-6032

6" Two Hand Sander

- Orbit Dia. 10 mm

WX-66-6132

6" Two Hand Sander

- Orbit Dia. 5 mm



Model No.	Max. Free Speed (RPM)	Orbit Diameter Inch (mm)	Pad Size Inch (mm)	Air Consumption CFM (L/Min)	Length Inch (mm)	Weight Lbs (Kg)	Air Inlet (NPT)	Hose Size ID Inch (mm)	Noise Level dB (A)
WX-65-6132	12,000	3/16 (5)	5 (125)	3 (85)	10-5/8 (268)	2.2 (1.0)	1/4"	3/8 (10)	80
WX-66-6032	12,000	3/8 (10)	6 (150)	3 (85)	10-5/8 (268)	2.2 (1.0)	1/4"	3/8 (10)	80
WX-66-6132	12,000	3/16 (5)	6 (150)	3 (85)	10-5/8 (268)	2.2 (1.0)	1/4"	3/8 (10)	80
WX-65-6132A	12,000	3/16 (5)	5 (125)	3 (85)	10-5/8 (268)	2.2 (1.0)	1/4"	3/8 (10)	84
WX-66-6032A	12,000	3/8 (10)	6 (150)	3 (85)	10-5/8 (268)	2.2 (1.0)	1/4"	3/8 (10)	84
WX-66-6132A	12,000	3/16 (5)	6 (150)	3 (85)	10-5/8 (268)	2.2 (1.0)	1/4"	3/8 (10)	84
WX-65-5132	12,000	3/16 (5)	5 (125)	3 (85)	10-5/8 (268)	2.2 (1.0)	1/4"	3/8 (10)	80
WX-66-5032	12,000	3/8 (10)	6 (150)	3 (85)	10-5/8 (268)	2.2 (1.0)	1/4"	3/8 (10)	80
WX-66-5132	12,000	3/16 (5)	6 (150)	3 (85)	10-5/8 (268)	2.2 (1.0)	1/4"	3/8 (10)	80
WX-65-5132A	12,000	3/16 (5)	5 (125)	3 (85)	10-5/8 (268)	2.2 (1.0)	1/4"	3/8 (10)	84
WX-66-5032A	12,000	3/8 (10)	6 (150)	3 (85)	10-5/8 (268)	2.2 (1.0)	1/4"	3/8 (10)	84
WX-66-5132A	12,000	3/16 (5)	6 (150)	3 (85)	10-5/8 (268)	2.2 (1.0)	1/4"	3/8 (10)	84

3" Buffers



WX-63-5432

3" Buffer

- Oil Free
- Orbit Dia. 14 mm



WX-63-5137

3" Buffer

WX-63-5237

3" Buffer

- Oil Free
- Orbit Dia 2.5 mm



WX-63-6432

3" Buffer

- Orbit Dia. 14 mm



WX-63-6133

3" Buffer

WX-63-6233

3" Buffer

- Orbit Dia. 2.5 mm



Model No.	Max. Free Speed (RPM)	Orbit Diameter Inch (mm)	Pad Size Inch (mm)	Air Consumption CFM (L/Min)	Length Inch (mm)	Weight Lbs (Kg)	Air Inlet (NPT)	Hose Size ID Inch (mm)	Noise Level dB (A)
WX-63-5432	12,000	9/16 (14)	3 (75)	3 (85)	10 (252)	2.2 (1.0)	1/4"	3/8 (10)	82
WX-63-6432	12,000	9/16 (14)	3 (75)	3 (85)	10 (252)	2.2 (1.0)	1/4"	3/8 (10)	82
WX-63-5137	12,000	3/16 (5)	3 (75)	2 (57)	5-3/16 (132)	1.4 (0.6)	1/4"	3/8 (10)	76
WX-63-5237	12,000	3/32 (2.5)	3 (75)	2 (57)	5-3/16 (132)	1.4 (0.6)	1/4"	3/8 (10)	76
WX-63-6133	12,000	3/16 (5)	3 (75)	2 (57)	5-3/16 (132)	1.4 (0.6)	1/4"	3/8 (10)	76
WX-63-6233	12,000	3/32 (2.5)	3 (75)	2 (57)	5-3/16 (132)	1.4 (0.6)	1/4"	3/8 (10)	76

3" Buffers

Vertical Sander/Polisher



Features :

- Composite Motor Housing
- with Air Regulator
- 3,500 RPM
- Lightweight 1.1 Kg
- 0.6 HP Motor



WX-6N-6636

5" Vertical Sander / Polisher

WX-6P-6636

6" Vertical Sander / Polisher



WX-65-6636G

5" Vertical Sander / Polisher

WX-66-6636G

6" Vertical Sander / Polisher



#6N-663617-11S
Silencer



#6N-663609-11
Silencer (Installed)



#6N-663636-11 #80 Grit
5" White Compounding Pad
- Velcro



#6P-663636-11 #80 Grit
6" White Compounding Pad
- Velcro

#6N-663637-11 #70 Grit
5" Yellow Compounding Pad
- Velcro

#6P-663637-11 #70 Grit
6" Yellow Compounding Pad
- Velcro



#6N-663638-11
5" Wool Polishing Pad
- Velcro



#6N-666131V-6
6" Wool Polishing Pad -
Velcro

Model No.	Free Speed (RPM)	Spindle Thread	Pad Size Inch (mm)	Air Consumption CFM (L/Min)	Length Inch (mm)	Weight Lbs (Kg)	Air Inlet (NPT)	Hose Size ID Inch (mm)	Noise Level dB (A)
WX-6N-6636	3,500	5/16"-24	5 (125)	3.9 (110)	132x206x192	2.2 (1.0)	1/4"	3/8 (10)	80
WX-6P-6636	3,500	5/16"-24	6 (150)	3.9 (110)	132x206x192	2.2 (1.0)	1/4"	3/8 (10)	80
WX-65-6636G	5,000	5/16"-24	5 (125)	3.9 (110)	134x235x220	2.6 (1.2)	1/4"	3/8 (10)	80
WX-66-6636G	1,800	5/16"-24	6 (150)	3.9 (110)	134x235x220	2.6 (1.2)	1/4"	3/8 (10)	80

Vertical Sander/Polisher



WX-6203

7" Vertical Polisher

WX-6303

7" Vertical Sander / Polisher

- Built-in Comfort Grip
- Low Noise 85 dB (A)



WX-6102

Vertical Polisher (3" & 6")

- Safety Throttle Lever
- Side Handle



#654248-11
Spanner



#5D-619256
Standard Side Handle



#600627V-31
3" Sanding Pad



EH-522SUB
Exhaust Hose Assembly
(Optional)



#610227V-61
6" Sanding Pad

Model No.	Free Speed (RPM)	Spindle Thread	Pad Size Inch (mm)	Air Consumption CFM (L/Min)	Length Inch (mm)	Weight Lbs (Kg)	Air Inlet (NPT)	Hose Size ID Inch (mm)	Noise Level dB (A)
WX-6102	1,800	5/16"-24	3&6 (75&150)	6 (170)	7-3/8 (187)	2.8 (1.3)	1/4"	3/8 (10)	-
WX-6203	2,000	5/8"-11	7 (175)	11 (311)	7-3/8 (188)	4.8 (2.2)	1/4"	3/8 (10)	85
WX-6303	5,000	5/8"-11	7 (175)	11 (311)	7-3/8 (188)	4.8 (2.2)	1/4"	3/8 (10)	85

Vertical Sander/Polisher

High Speed Sanders



Reversible

WX-60-7251A 5" Reversible High Speed Sander

- Built-in Comfort Grip
- 3 Different Size of Pads
- Reversible
- Handle Exhaust
- 0.6 HP



#66029
5" Pad



#66028
4" Pad



#66027
3" Pad



> Operation of Reversible High Speed Sander


Reversible

WX-60-7253A 5" Reversible High Speed Sander

- Composite Motor Housing
- Reversing Bar on Both Sides
- Handle Exhaust
- Patented Silencer 83 dB (A)
- 0.6 HP



WX-0402 5" High Speed Sander

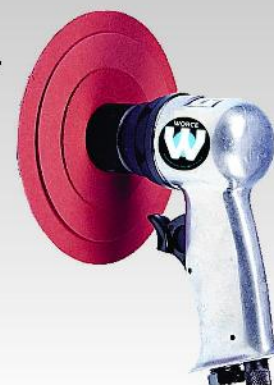

Reversible

WX-60-7254A 5" Reversible High Speed Sander

- Composite Motor Housing
- Reversing Bar on Both Sides
- Handle Exhaust
- Patented Silencer 83 dB (A)
- 0.6 HP



WX-660 5" High Speed Sander with Regulator



Model No.	Free Speed (RPM)	Pad Size Inch	Air Inlet (NPT)	Air Consumption CFM (L/Min)	Length Inch (mm)	Weight Lbs (Kg)	Noise Level dB (A)	Hose Size ID Inch (mm)
WX-60-7251A	16,000	3, 4, 5	1/4"	4 (113)	5-1/2 (142)	2.2 (1.0)	—	3/8 (10)
WX-60-7253A	16,000	3, 4, 5	3/8"	4 (113)	5-3/4 (146)	2.2 (1.0)	83	3/8 (10)
WX-60-7254A	16,000	3, 4, 5	3/8"	4 (113)	5-3/4 (146)	2.2 (1.0)	83	3/8 (10)
WX-660	14,000	5-1/2"	1/4"	4 (113)	6-1/8 (155)	2.2 (1.0)	—	3/8 (10)
WX-0402	16,000	5-1/2"	1/4"	4 (113)	7-1/2 (190)	2 (0.9)	—	3/8 (10)

High Speed Sanders

Belt Sanders



WX-6T-6202
20 mm Belt Sander
- Comfort Grip
- Safety Lever
- Silencer



WX-6T-6200
20 mm Belt Sander
- Comfort Grip
- Safety Lever
- Silencer



WX-6W-6120
13 mm Belt Sander
- Comfort Grip
- Safety Lever
- Silencer



WX-6W-6100
10 mm Belt Sander
WX-6W-6102
13 mm Belt Sander
- Comfort Grip
- Safety Lever
- Silencer



WX-6X-6300
30 mm Belt Sander
- Comfort Grip
- Safety Lever
- Silencer



WX-6W-6203
10 mm Belt Sander
- Comfort Grip
- Safety Lever
- Silencer

Model No.	Free Speed (RPM)	Air Inlet (NPT)	Hose Size ID Inch (mm)	Belt Size Inch (mm)	Folded Length Inch (mm)	Max. Length Inch (mm)	Weight Lbs (Kg)	Air Consumption CFM (L/Min)	Noise Level dB (A)
WX-6T-6200	18,000	1/4"	3/8"	3/4x20-1/2 (20x520)	10 (255)	16 (407)	3.5 (1.6)	4.2 (119)	84
WX-6T-6202	18,000	1/4"	3/8"	3/4x20-1/2 (20x520)	10 (255)	16 (407)	3.3 (1.5)	4.2 (119)	84
WX-6W-6100	20,000	1/4"	3/8"	3/8 x 13 (10x330)	8-1/8 (207)	13 (330)	1.8 (0.85)	4.2 (119)	84
WX-6W-6120	20,000	1/4"	3/8"	1/2 x 24 (13x610)	12-1/4 (310)	18-1/2 (470)	2 (0.95)	4.2 (119)	84
WX-6W-6203	20,000	1/4"	3/8"	3/8 x 13 (10x330)	10 (255)	16 (407)	2 (0.9)	3.9 (110)	84
WX-6X-6300	12,000	1/4"	3/8"	1-5/32x21-1/4 (30x540)	10 (255)	16-1/2 (420)	5.0 (2.3)	4.2 (119)	84
WX-6W-6102	20,000	1/4"	3/8"	1/2x13 (13x330)	8-1/8 (207)	13 (330)	1.8 (0.85)	4.2 (119)	84

Belt Sanders



WX-6Z-6104
Belt Sander
- Comfort Grip
- Safety Lever
- Silencer



WX-6Z-6103
Belt Sander
- Comfort Grip
- Safety Lever
- Silencer



WX-6Z-6201
Belt Sander
- Comfort Grip
- Safety Lever
- Silencer



WX-6Z-6105
Versatility Belt Sander
- Composite Motor Housing
- Quick and Easy Belt Change
- Lightweight Composite Belt Guard

WX-6Z-6201K
Belt Sander Kit



WX-6Z-6103K
Belt Sander Kit



WX-6Z-6104K
Belt Sander Kit



Model No.	Free Speed (RPM)	Air Inlet (NPT)	Hose Size ID Inch (mm)	Belt Size Inch (mm)	Length Inch (mm)	Weight Lbs (Kg)	Air Consumption CFM (L/Min)
WX-6Z-6103	20,000	1/4"	3/8"	1/2 x 12 (13 x 305)	11-1/2 (292)	2.2 (1.0)	3.9 (110)
WX-6Z-6104	20,000	1/4"	3/8"	1/2 x 12 (13 x 305)	12-3/8 (314)	2.2 (1.0)	4.2 (119)
WX-6Z-6105	20,000	1/4"	3/8"	1/2 (13) W x 24 (610) L	15-3/4 (400)	3 (1.36)	4.2 (119)
WX-6Z-6201	18,000	1/4"	3/8"	1/4-1 (6-25)	15-3/8 (390)	3.1 (1.4)	4.5 (119)

Finger Sanders



Features :

- **Ergonomic Handle Design**
- **Built-in Comfort Grip**
- **Handle Exhaust**
- **with Regulator**

WX-6C30

Finger Sander

- Orbit Dia. 3 mm



WX-6C31

Finger Sander

- Orbit Dia. 3 mm



Model No.	Blows Per Min. (BPM)	Air Inlet (NPT)	Hose Size ID Inch (mm)	Pad Size Inch (mm)	Length Inch (mm)	Weight Lbs (Kg)	Air Consumption CFM (L/Min)
WX-6C30	11,000	1/4"	3/8 (10)	1-1/2 x 3-3/8 (40 x 86)	7-1/2 (190)	2.0 (0.9)	3.5 (99)
WX-6C31	11,000	1/4"	3/8 (10)	1-1/8 (28.5)	7-1/2 (190)	2.0 (0.9)	3.5 (99)

Air Trimmer



WX-205

Air Trimmer



Model No.	Free Speed (RPM)	Air Inlet (NPT)	Hose Size ID Inch (mm)	Air Consumption CFM (L/Min)	Length Inch (mm)	Weight Lbs (Kg)
WX-205	20,000	1/4"	1/4 (6)	4 (113)	9 (229)	0.8 (0.4)