



Auto Shut-Off Screwdrivers



WX-BP-0412T

Auto Shut-Off Screwdriver (400 RPM)

WX-BP-1008T

Auto Shut-Off Screwdriver (1,000 RPM)

WX-BP-2004T

Auto Shut-Off Screwdriver (2,000 RPM)

WX-BP-0810T

Auto Shut-Off Screwdriver (800 RPM)

WX-BP-1305T

Auto Shut-Off Screwdriver (1,300 RPM)

- Oil Free Air Motor
- 1,000,000 Cycles Life Time
- Power of The Motor : 260 Watt



WX-EP-0705T

Auto Shut-Off Screwdriver (650 RPM)

WX-EP-1005T

Auto Shut-Off Screwdriver (950 RPM)

WX-EP-1404T

Auto Shut-Off Screwdriver (1,400 RPM)

- Oil Free Air Motor
- 1,000,000 Cycles Life Time
- Power of The Motor : 150 Watt



Model No.	Free Speed (RPM)	Air Inlet (NPT)	Air Consumption CFM (L/Min)	Torque Range In-lbs (Nm)	Length Inch (mm)	Weight Lbs (Kg)	Noise Level db (A)
WX-EP-0705T	650	1/4"	1.8 (51)	3.5-44.3 (0.4-5)	7 (178)	1.59 (0.72)	71
WX-EP-1005T	950	1/4"	1.8 (51)	3.5-39.8 (0.4-4.5)	7 (178)	1.59 (0.72)	71
WX-EP-1404T	1,400	1/4"	1.8 (51)	3.5-31 (0.4-3.5)	7 (178)	1.59 (0.72)	71
WX-BP-0412T	400	1/4"	2.1 (59)	31-106.2 (3.5-12)	8-3/8 (210)	2.3 (1.1)	73
WX-BP-0810T	800	1/4"	2.1 (59)	31-84.1 (3.5-9.5)	8-3/8 (210)	2.3 (1.1)	73
WX-BP-1008T	1,000	1/4"	2.1 (59)	31-70.8 (3.5-8)	8-3/8 (210)	2.3 (1.1)	73
WX-BP-1305T	1,300	1/4"	2.1 (59)	3.5-44.3 (0.4-5)	7-3/4 (195)	2.1 (1)	73
WX-BP-2004T	2,000	1/4"	2.1 (59)	3.5-35.4 (0.4-4)	7-3/4 (195)	2.1 (1)	73

Auto Shut-Off Screwdrivers



WX-ES-0705L (Lever Start)

Auto Shut-Off Screwdriver (650 RPM)

WX-ES-1005L (Lever Start)

Auto Shut-Off Screwdriver (950 RPM)

WX-ES-1404L (Lever Start)

Auto Shut-Off Screwdriver (1,400 RPM)

- **Oil Free Air Motor**
- **1,000,000 Cycles Life Time**
- **Power of The Motor : 150 Watt**



WX-ES-0705P (Push Start)

Auto Shut-Off Screwdriver (650 RPM)

WX-ES-1005P (Push Start)

Auto Shut-Off Screwdriver (950 RPM)

WX-ES-1404P (Push Start)

Auto Shut-Off Screwdriver (1,400 RPM)

- **Oil Free Air Motor**
- **1,000,000 Cycles Life Time**
- **Power of The Motor : 150 Watt**



WX-EL-0207L (Lever Start)

Auto Shut-Off Angle Nutrunner (150 RPM)

WX-EL-0705L (Lever Start)

Auto Shut-Off Angle Nutrunner (650 RPM)

WX-EL-1004L (Lever Start)

Auto Shut-Off Angle Nutrunner (950 RPM)

WX-EL-1403L (Lever Start)

Auto Shut-Off Angle Nutrunner (1,400 RPM)

- **Oil Free Air Motor**
- **1,000,000 Cycles Life Time**
- **Power of The Motor : 150 Watt**



Model No.	Free Speed (RPM)	Air Inlet (NPT)	Air Consumption CFM (L/Min)	Torque Range In-lbs (Nm)	Length Inch (mm)	Weight Lbs (Kg)	Noise Level db (A)
WX-ES-0705L	650	1/4"	1.6 (46)	3.5-44.3 (0.4-5)	9 (228)	1.32 (0.6)	73
WX-ES-1005L	950	1/4"	1.6 (46)	3.5-39.8 (0.4-4.5)	9 (228)	1.32 (0.6)	73
WX-ES-1404L	1,400	1/4"	1.6 (46)	3.5-31 (0.4-3.5)	9 (228)	1.32 (0.6)	73
WX-ES-0705P	650	1/4"	1.6 (46)	3.5-44.3 (0.4-5)	9-1/8 (230)	1.3 (0.59)	73
WX-ES-1005P	950	1/4"	1.6 (46)	3.5-39.8 (0.4-4.5)	9-1/8 (230)	1.3 (0.59)	73
WX-ES-1404P	1,400	1/4"	1.6 (46)	3.5-31 (0.4-3.5)	9-1/8 (230)	1.3 (0.59)	73
WX-EL-0207L	150	1/4"	1.6 (46)	8.9-62 (1-7)	10-7/8 (276)	1.54 (0.7)	73
WX-EL-0705L	650	1/4"	1.6 (46)	7.1-44.3 (0.8-5)	10-7/8 (276)	1.54 (0.7)	73
WX-EL-1004L	950	1/4"	1.6 (46)	7.1-35.4 (0.8-3)	10-7/8 (276)	1.54 (0.7)	73
WX-EL-1403L	1,400	1/4"	1.6 (46)	7.1-26.6 (0.8-3)	10-7/8 (276)	1.54 (0.7)	73

Auto Shut-Off Screwdrivers



WX-BS-0412L (Lever Start)

Auto Shut-Off Screwdriver (400 RPM)

WX-BS-0810L (Lever Start)

Auto Shut-Off Screwdriver (850 RPM)

WX-BS-1008L (Lever Start)

Auto Shut-Off Screwdriver (1,000 RPM)

WX-BS-1405L (Lever Start)

Auto Shut-Off Screwdriver (1,350 RPM)

WX-BS-2004L (Lever Start)

Auto Shut-Off Screwdriver (2,000 RPM)

- Oil Free Air Motor

- 1,000,000 Cycles Life Time

- Power of The Motor : 260 Watt



WX-BS-0412P (Push Start)

Auto Shut-Off Screwdriver (400 RPM)

WX-BS-0810P (Push Start)

Auto Shut-Off Screwdriver (850 RPM)

WX-BS-1008P (Push Start)

Auto Shut-Off Screwdriver (1,000 RPM)

WX-BS-1405P (Push Start)

Auto Shut-Off Screwdriver (1,350 RPM)

WX-BS-2004P (Push Start)

Auto Shut-Off Screwdriver (2,000 RPM)

- Oil Free Air Motor

- 1,000,000 Cycles Life Time

- Power of The Motor : 260 Watt



WX-CL-0426L (Lever Start)

Auto Shut-Off Angle Nutrunner (350 RPM)

- Oil Free Air Motor

- 1,000,000 Cycles Life Time

- Power of The Motor : 260 Watt



Model No.	Free Speed (RPM)	Air Inlet (NPT)	Air Consumption CFM (L/Min)	Torque Range In-lbs (Nm)	Length Inch (mm)	Weight Lbs (Kg)	Noise Level db (A)
WX-BS-0412L	400	1/4"	1.8 (51)	31-106.2 (3.5-12)	10-3/4 (271)	2.05 (0.93)	75
WX-BS-0810L	850	1/4"	1.8 (51)	31-84.1 (3.5-9.5)	10-3/4 (271)	2.05 (0.93)	75
WX-BS-1405L	1,350	1/4"	1.8 (51)	3.5-44.3 (0.4-5)	9-7/8 (251)	1.87 (0.85)	75
WX-BS-2004L	2,000	1/4"	1.8 (51)	3.5-35.4 (0.4-4)	9-7/8 (251)	1.87 (0.85)	75
WX-BS-0412P	950	1/4"	1.8 (51)	31-106.2 (3.5-12)	10-3/4 (271)	2 (0.9)	75
WX-BS-0810P	1,400	1/4"	1.8 (51)	31-84.1 (3.5-9.5)	10-3/4 (271)	2 (0.9)	75
WX-BS-1405P	150	1/4"	1.8 (51)	3.5-44.3 (0.4-5)	9-7/8 (251)	1.8 (0.8)	75
WX-BS-2004L	650	1/4"	1.8 (51)	3.5-35.4 (0.4-4)	9-7/8 (251)	1.8 (0.8)	75
WX-CL-0426L	350	1/4"	1.8 (51)	101.8-230.1 (11.5-26)	13-1/8 (331)	3.19 (1.45)	75
WX-BS-1008L	1,000	1/4"	1.8 (51)	31-70.8 (3.5-8)	10-3/4 (271)	2.05 (0.93)	75
WX-BS-1008P	1,000	1/4"	1.8 (51)	31-70.8 (3.5-8)	10-3/4 (271)	2 (0.9)	75

Auto Shut-Off Screwdrivers



Features :

- Pistol Version with Air On Top
- with 2 Extra Springs for Different Torque
- Reversible
- Rear Exhaust
- Built-in Cushion Grip
- Low Noise 83 dB (A)



► Operation of Auto Shut-Off Screwdriver



► Operation of Auto Shut-Off Screwdriver

WX-AS004

Auto Shut-Off Screwdriver (600 RPM)

WX-AS104

Auto Shut-Off Screwdriver (1,000 RPM)

WX-AS204

Auto Shut-Off Screwdriver (1,800 RPM)

WX-AS304

Auto Shut-Off Screwdriver (2,300 RPM)

- Pistol Version with Air On Top
- Reversible
- Low Noise 83 dB (A)



Air On Top



Adjustable Torque



Accessories (Optional) :

- Adjusting springs of three different tensions are available for adjustment of torque



WX000149-11SUB

Cam Assembly

Torque Range : 10~38 In-lbs



WX000149-12SUB

Cam Assembly

Torque Range : 5~19 In-lbs



WX000149-13SUB

Cam Assembly

Torque Range : 2~8 In-lbs



WX000149-11

Strong Spring(ø 3.5 mm)

(Good for SM-AS004, SM-AS104)



WX000149-12

Medium Spring(ø 2.8 mm)

(Good for SM-AS204)



WX000149-13

Light Spring(ø 2.0 mm)

Model No.	Free Speed (RPM)	Air Inlet (NPT)	Air Consumption CFM (L/Min)	Torque Range In-lbs (Nm)	Length Inch (mm)	Weight Lbs (Kg)	Hose Size ID Inch (mm)	Noise Level db (A)
WX-AS004	600	1/4"	4 (113)	4-45 (0.5-5.1)	8-7/8 (225)	2.0 (0.9)	3/8 (10)	83
WX-AS104	1,000	1/4"	4 (113)	3-40 (0.4-4.5)	8-3/4 (216)	2.0 (0.9)	3/8 (10)	83
WX-AS204	1,800	1/4"	4 (113)	3-26 (0.3-2.9)	8-11/16 (220)	2.0 (0.9)	3/8 (10)	83
WX-AS304	2,300	1/4"	4 (113)	3-26 (0.3-2.9)	8-7/16 (215)	2.0 (0.9)	3/8 (10)	83

Auto Shut-Off Screwdrivers



Accessories (Optional):



WX000149-11SUB
Cam Assembly
Torque Range : 10~38 In-lbs



WX000149-12SUB
Cam Assembly
Torque Range : 5~19 In-lbs



WX000149-13SUB
Cam Assembly
Torque Range : 2~8 In-lbs



WX000149-11
Strong Spring(ø 3.5 mm)
(Good for SM-AS004, SM-AS104)



WX000149-12
Medium Spring(ø 2.8 mm)
(Good for SM-AS204)



WX000149-13
Light Spring(ø 2.0 mm)

WX-AS002 / WX-AS102 / WX-AS202 Auto Shut-Off Screwdriver

- Pistol Version with Air On Top
- Reversible
- Low Noise 83 dB (A)



WX-AS002A / WX-AS102A / WX-AS202A Auto Shut-Off Screwdriver

- Built-in Cushion Grip
- Reversible
- Low Noise 83 dB (A)



WX-AS005 / WX-AS105 / WX-AS205 / WX-AS305 Auto Shut-Off Screwdriver

- Built-in Cushion Grip
- Reversible
- Low Noise 83 dB (A)



Model No.	Free Speed (RPM)	Air Inlet (NPT)	Air Consumption CFM (L/Min)	Torque Range In-lbs (Nm)	Length Inch (mm)	Weight Lbs (Kg)	Hose Size ID Inch (mm)	Noise Level db (A)
WX-AS002 WX-AS002A	600	1/4"	4 (113)	4-45 (0.5-5.1)	8-3/4 (216)	1.98 (0.9)	3/8 (10)	83
WX-AS102 WX-AS102A	1,000	1/4"	4 (113)	3-40 (0.4-4.5)	8-3/8 (212)	1.98 (0.9)	3/8 (10)	83
WX-AS202 WX-AS202A	1,800	1/4"	4 (113)	3-26 (0.3-2.9)	8-9/16 (216)	1.98 (0.9)	3/8 (10)	83
WX-AS005	650	1/4"	4 (113)	4-45 (0.5-5.1)	9-5/16 (237)	1.54 (0.7)	3/8 (10)	83
WX-AS105	1,100	1/4"	4 (113)	3-40 (0.4-4.5)	8-15/16 (227)	1.54 (0.7)	3/8 (10)	83
WX-AS205	1,800	1/4"	4 (113)	3-26 (0.3-2.9)	9-1/8 (232)	1.54 (0.7)	3/8 (10)	83
WX-AS305	2,300	1/4"	4 (113)	3-26 (0.3-2.9)	8-15/16 (227)	1.54 (0.7)	3/8 (10)	83

Air Screwdrivers



WX-89-7251

1/4" Air Screwdriver

- Direct Drive
- Ergonomic Handle Design
- Variable Speed Trigger
- Forward and Reverse Control on Top
- Rotating Air Inlet
- Built-in Comfort Grip



WX-88-7251

1/4" Air Screwdriver

- Direct Drive
- Ergonomic Handle Design
- Variable Speed Trigger
- Forward and Reverse Control on Top
- Rotating Air Inlet
- Built-in Comfort Grip



WX-89-8020

1/4" Air Screwdriver

- Direct Drive
- Ergonomic Handle Design
- Variable Speed Trigger
- Forward and Reverse Control
- Built-in Comfort



WX-88-8020

1/4" Air Screwdriver

- Direct Drive
- Ergonomic Handle Design
- Variable Speed Trigger
- Forward and Reverse Control
- Built-in Comfort



WX-89-8225

1/4" Air Screwdriver

- Direct Drive
- Ergonomic Handle Design
- Variable Speed Trigger
- Forward and Reverse Control
- Built-in Comfort



WX-88-8225

1/4" Air Screwdriver

- Direct Drive
- Ergonomic Handle Design
- Variable Speed Trigger
- Forward and Reverse Control
- Built-in Comfort

Model No.	Free Speed (RPM)	Hex Drive Capacity (Inch)	Air Inlet (NPT)	Air Consumption CFM (L/Min)	Hose Size ID Inch (mm)	Length Inch (mm)	Weight Lbs (Kg)
WX-88-7251	1,800	1/4"	1/4"	4 (113)	3/8"	7-3/16 (182)	2.4 (1.1)
WX-89-7251	800	1/4"	1/4"	4 (113)	3/8"	7-7/8 (200)	2.9 (1.3)
WX-89-8225	1,800	1/4"	1/4"	4 (113)	3/8"	6-3/4 (172)	2.4 (1.1)
WX-89-8225	800	1/4"	1/4"	4 (113)	3/8"	7-7/8 (200)	2.9 (1.3)
WX-88-8020	1,800	1/4"	1/4"	4 (113)	3/8"	7-3/4 (180)	2.2 (1)
WX-89-8020	800	1/4"	1/4"	4 (113)	3/8"	7-7/8 (198)	2.6 (1.2)

Air Screwdrivers



WX-89-7253P
1/4" Air Screwdriver
 - Direct Drive
 - Composite Motor Housing
 - Low Noise 83 dB (A)
 - Two Speed Trigger



WX-88-7253P
1/4" Air Screwdriver
 - Direct Drive
 - Composite Motor Housing
 - Low Noise 83 dB (A)
 - Two Speed Trigger



WX-89-7254P
1/4" Air Screwdriver
 - Direct Drive
 - Composite Motor Housing
 - Low Noise 83 dB (A)
 - Two Speed Trigger





WX-88-7254P
1/4" Air Screwdriver
 - Direct Drive
 - Composite Motor Housing
 - Low Noise 83 dB (A)
 - Two Speed Trigger

Model No.	Free Speed (RPM)	Hex Drive Capacity (Inch)	Air Inlet (NPT)	Air Consumption CFM (L/Min)	Hose Size ID Inch (mm)	Length Inch (mm)	Weight Lbs (Kg)	Torque (In-Lbs)	Noise Level dB (A)
WX-88-7253P	1,800	1/4"	1/4"	4 (113)	3/8"	7-3/16 (182)	2.4 (1.1)	52	83
WX-89-7253P	800	1/4"	1/4"	4 (113)	3/8"	7-7/8 (200)	2.8 (1.3)	130	83
WX-88-7254P	1,800	1/4"	1/4"	4 (113)	3/8"	7-3/16 (182)	2.4 (1.1)	52	83
WX-89-7254P	800	1/4"	1/4"	4 (113)	3/8"	7-7/8 (200)	2.8 (1.3)	130	83



Features :

- External Adjustable
- Forward : Adjustable Torque
- Reverse : Full Torque
- Planetary Gear System with Needle Bearings (Option)
- Variable Speed Trigger
- Muffler in Handle

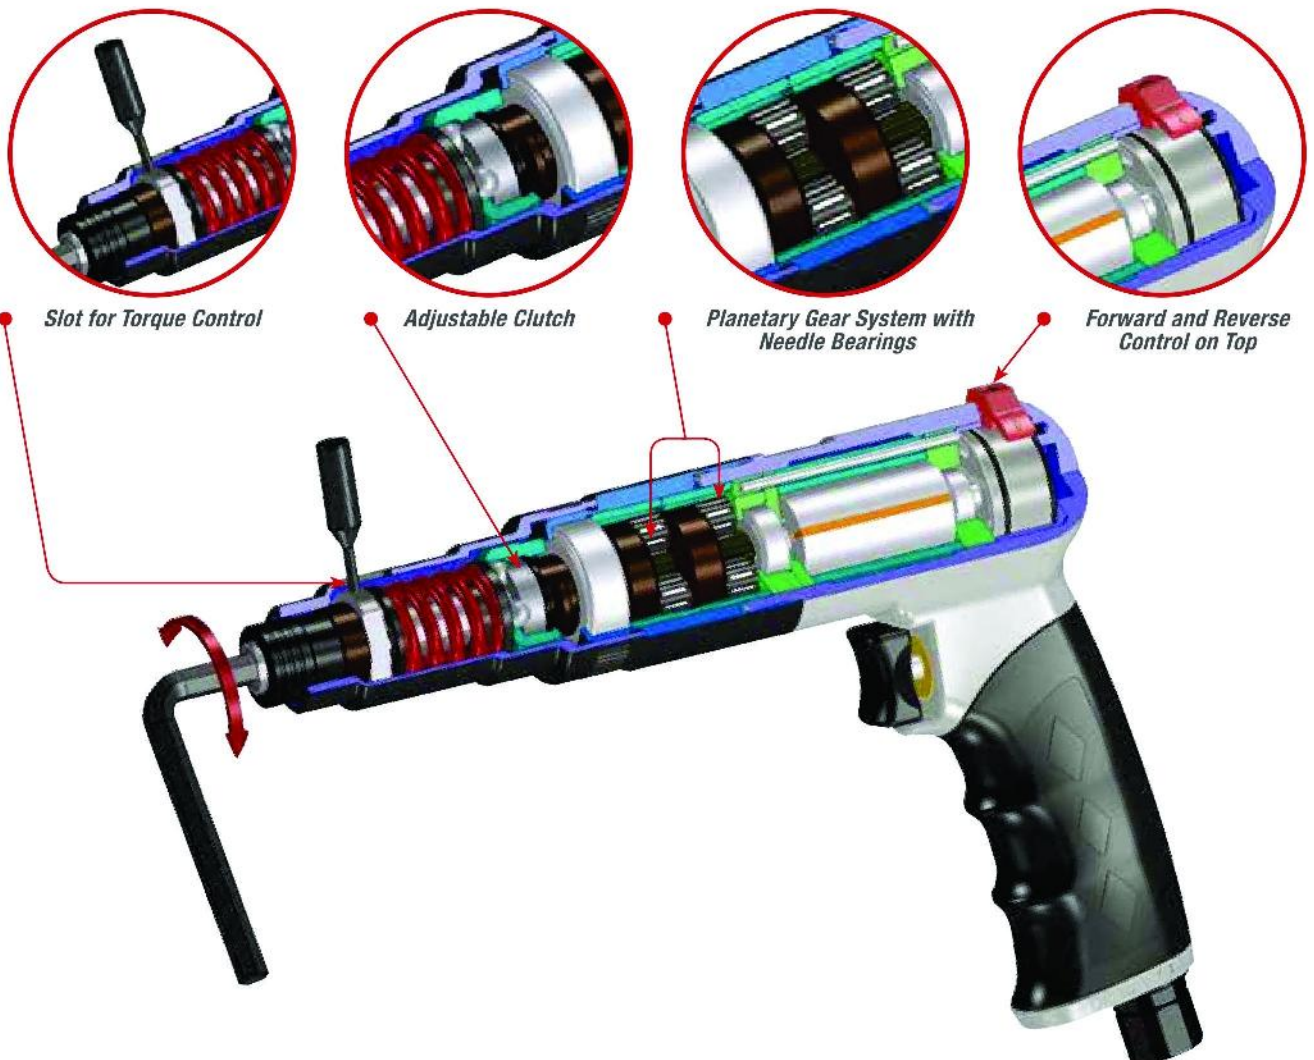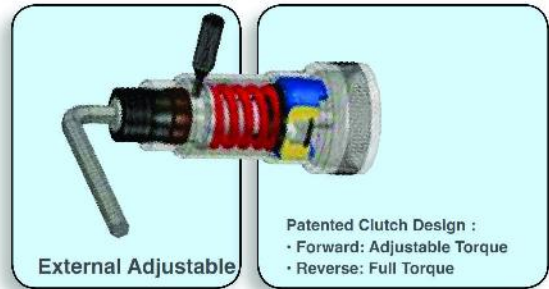

Air Screwdrivers



WX-83-7253P

1/4" Air Screwdriver

- Adjustable Clutch
- Composite Motor Housing
- Low Noise 83 dB (A)
- Forward : Adjustable Torque
- Reverse : Full Torque
- Two Speed Trigger



WX-82-7253P

1/4" Air Screwdriver

- Adjustable Clutch
- Composite Motor Housing
- Low Noise 83 dB (A)
- Forward : Adjustable Torque
- Reverse : Full Torque
- Two Speed Trigger



WX-83-7253PF

1/4" Air Screwdriver

- External Adjustable Clutch
- Composite Motor Housing
- Low Noise 83 dB (A)
- Forward : Adjustable Torque
- Reverse : Full Torque
- Two Speed Trigger



WX-82-7253PF

1/4" Air Screwdriver

- External Adjustable Clutch
- Composite Motor Housing
- Low Noise 83 dB (A)
- Forward : Adjustable Torque
- Reverse : Full Torque
- Two Speed Trigger



WX-86-7253P

1/4" Air Screwdriver

- Positive Clutch
- Composite Motor Housing
- Low Noise 83 dB (A)
- Forward : Adjustable Torque
- Reverse : Full Torque
- Two Speed Trigger



WX-84-7253P

1/4" Air Screwdriver

- Positive Clutch
- Composite Motor Housing
- Low Noise 83 dB (A)
- Forward : Adjustable Torque
- Reverse : Full Torque
- Two Speed Trigger

Model No.	Free Speed (RPM)	Hex Drive Capacity (Inch)	Air Inlet (NPT)	Air Consumption CFM (L/Min)	Hose Size ID Inch (mm)	Length Inch (mm)	Weight Lbs (Kg)	Torque (In-Lbs)	Noise Level dB (A)
WX-82-7253P	1,800	1/4"	1/4"	4 (113)	3/8"	7-1/4 (208)	2.2 (1.0)	30-70	83
WX-83-7253P	800	1/4"	1/4"	4 (113)	3/8"	9 (228)	2.6 (1.2)	30-95	83
WX-84-7253P	1,800	1/4"	1/4"	4 (113)	3/8"	7-3/4 (196)	2.2 (1.0)	115	83
WX-86-7253P	800	1/4"	1/4"	4 (113)	3/8"	7-7/8 (200)	2.4 (1.1)	145	83
WX-82-7253PF	1,800	1/4"	1/4"	4 (113)	3/8"	8-1/4 (208)	2.2 (1.0)	20-50	83
WX-83-7253PF	800	1/4"	1/4"	4 (113)	3/8"	9 (228)	2.6 (1.2)	45-80	83

Air Screwdrivers



WX-83-7254P

1/4" Air Screwdriver

- Adjustable Clutch
- Composite Motor Housing
- Low Noise 83 dB (A)
- Forward : Adjustable Torque
- Reverse : Full Torque
- Two Speed Trigger



WX-82-7254P

1/4" Air Screwdriver

- Adjustable Clutch
- Composite Motor Housing
- Low Noise 83 dB (A)
- Forward : Adjustable Torque
- Reverse : Full Torque
- Two Speed Trigger



WX-83-7254PF

1/4" Air Screwdriver

- External Adjustable Clutch
- Composite Motor Housing
- Low Noise 83 dB (A)
- Forward : Adjustable Torque
- Reverse : Full Torque
- Two Speed Trigger



WX-82-7254PF

1/4" Air Screwdriver

- External Adjustable Clutch
- Composite Motor Housing
- Low Noise 83 dB (A)
- Forward : Adjustable Torque
- Reverse : Full Torque
- Two Speed Trigger



WX-86-7254P

1/4" Air Screwdriver

- Positive Clutch
- Composite Motor Housing
- Low Noise 83 dB (A)
- Forward : Adjustable Torque
- Reverse : Full Torque
- Two Speed Trigger



WX-84-7254P

1/4" Air Screwdriver

- Positive Clutch
- Composite Motor Housing
- Low Noise 83 dB (A)
- Forward : Adjustable Torque
- Reverse : Full Torque
- Two Speed Trigger

Model No.	Free Speed (RPM)	Hex Drive Capacity (Inch)	Air Inlet (NPT)	Air Consumption CFM (L/Min)	Hose Size ID Inch (mm)	Length Inch (mm)	Weight Lbs (Kg)	Torque (In-Lbs)	Noise Level dB (A)
WX-82-7254P	1,800	1/4"	1/4"	4 (113)	3/8"	8-1/4 (208)	2.2 (1.0)	30-70	83
WX-83-7254P	800	1/4"	1/4"	4 (113)	3/8"	9 (228)	2.6 (1.2)	30-95	83
WX-84-7254P	1,800	1/4"	1/4"	4 (113)	3/8"	7-3/4 (196)	2.2 (1.0)	115	83
WX-86-7254P	800	1/4"	1/4"	4 (113)	3/8"	7-7/8 (200)	2.4 (1.1)	145	83
WX-82-7254PF	1,800	1/4"	1/4"	4 (113)	3/8"	7-11/16 (196)	2.2 (1.0)	20-50	83
WX-83-7254PF	800	1/4"	1/4"	4 (113)	3/8"	8-7/16 (214)	2.6 (1.2)	45-80	83

Air Screwdrivers



Features :

- Ergonomic Handle Design
- Variable Speed Trigger
- Planetary Gear System with Needle Bearings
- Built-in Comfort Grip
- Forward and Reverse Control on Top & Painted in Red
- Rotating Air Inlet
- Handle Exhaust
- Low Noise 83 dB (A)

Quiet Series



WX-83-7251
1/4" Air Screwdriver



WX-82-7251
1/4" Air Screwdriver



WX-86-7251
1/4" Air Screwdriver



WX-84-7251
1/4" Air Screwdriver

Model No.	Free Speed (RPM)	Hex Drive Capacity (Inch)	Air Inlet (NPT)	Air Consumption CFM (L/Min)	Hose Size ID Inch (mm)	Length Inch (mm)	Weight Lbs (Kg)	Torque (In-Lbs)	Noise Level dB (A)
WX-82-7251	1,800	1/4"	1/4"	4 (113)	3/8"	2-5/16 (1.3)	7-11/16 (196)	30-70	83
WX-83-7251	800	1/4"	1/4"	4 (113)	3/8"	8-7/16 (214)	3-1/10 (1.4)	30-95	83
WX-84-7251	1,800	1/4"	1/4"	4 (113)	3/8"	7-3/16 (182)	2-2/3 (1.2)	115	83
WX-86-7251	800	1/4"	1/4"	4 (113)	3/8"	7-7/8 (200)	3-1/2 (1.6)	145	83

Air Screwdrivers

Air Screwdrivers



WX-83-7251F

1/4" Air Screwdriver

- External Adjustable Clutch
- Ergonomic Handle Design
- Variable Speed Trigger
- Low Noise 83 dB (A)
- Rotating Air Inlet



WX-82-7251

1/4" Air Screwdriver

- External Adjustable Clutch
- Ergonomic Handle Design
- Variable Speed Trigger
- Low Noise 83 dB (A)
- Rotating Air Inlet



WX-85-7251

1/4" Air Screwdriver

- External Adjustable Clutch
- Ergonomic Handle Design
- Variable Speed Trigger
- Low Noise 83 dB (A)
- Rotating Air Inlet



WX-80-7251

1/4" Air Screwdriver

- External Adjustable Clutch
- Ergonomic Handle Design
- Variable Speed Trigger
- Low Noise 83 dB (A)
- Rotating Air Inlet



WX-87-7251

1/4" Air Screwdriver

- External Adjustable Clutch
- Ergonomic Handle Design
- Variable Speed Trigger
- Low Noise 83 dB (A)
- Rotating Air Inlet



WX-81-7251

1/4" Air Screwdriver

- External Adjustable Clutch
- Ergonomic Handle Design
- Variable Speed Trigger
- Low Noise 83 dB (A)
- Rotating Air Inlet



Model No.	Free Speed (RPM)	Hex Drive Capacity (Inch)	Air Inlet (NPT)	Air Consumption CFM (L/Min)	Hose Size ID Inch (mm)	Length Inch (mm)	Weight Lbs (Kg)	Torque (In-Lbs)	Noise Level dB (A)
WX-80-7251	1,800	1/4"	1/4"	4 (113)	3/8"	8-13/16 (224)	3-1/3 (1.5)	20-62	83
WX-85-7251	800	1/4"	1/4"	4 (113)	3/8"	9-1/2 (242)	3-1/2 (1.6)	20-100	83
WX-81-7251	1,800	1/4"	1/4"	4 (113)	3/8"	7-11/16 (196)	3-1/5 (1.45)	26-71	83
WX-87-7251	800	1/4"	1/4"	4 (113)	3/8"	8-7/16 (214)	3-1/2 (1.6)	44-100	83
WX-82-7251F	1,800	1/4"	1/4"	4 (113)	3/8"	2-5/16 (1.3)	7-11/16 (196)	30-70	83
WX-83-7251F	800	1/4"	1/4"	4 (113)	3/8"	8-7/16 (214)	3-1/10 (1.4)	30-95	83

Air Screwdrivers



WX-8235

1/4" Air Screwdriver

- Adjustable Clutch
- Ergonomic Handle Design
- Variable Speed Trigger
- Low Noise 83 dB (A)
- Handle Exhaust



WX-8225

1/4" Air Screwdriver

- Adjustable Clutch
- Ergonomic Handle Design
- Variable Speed Trigger
- Low Noise 83 dB (A)
- Handle Exhaust



WX-8265

1/4" Air Screwdriver

- Positive Clutch
- Ergonomic Handle Design
- Variable Speed Trigger
- Low Noise 83 dB (A)
- Handle Exhaust




WX-8245

1/4" Air Screwdriver

- Positive Clutch
- Ergonomic Handle Design
- Variable Speed Trigger
- Low Noise 83 dB (A)
- Handle Exhaust

Model No.	Free Speed (RPM)	Hex Drive Capacity (Inch)	Air Inlet (NPT)	Air Consumption CFM (L/Min)	Hose Size ID Inch (mm)	Length Inch (mm)	Weight Lbs (Kg)	Torque (In-Lbs)	Noise Level dB (A)
WX-8225	1,800	1/4"	1/4"	4 (113)	3/8"	7-3/4 (197)	2.6 (1.2)	30-70	83
WX-8235	800	1/4"	1/4"	4 (113)	3/8"	8-1/2 (216)	3 (1.4)	30-95	83
WX-8245	1,800	1/4"	1/4"	4 (113)	3/8"	7-1/4 (184)	2.8 (1.3)	115	83
WX-8265	800	1/4"	1/4"	4 (113)	3/8"	7-3/4 (197)	2.8 (1.3)	145	83

Air Screwdrivers

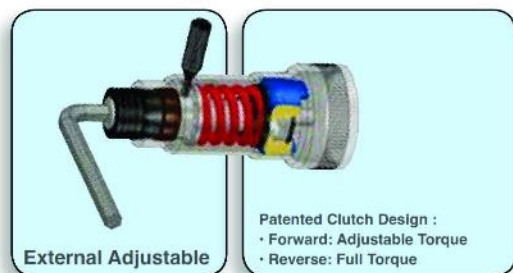

#802F37-11
 Red Spring (ø 3.2 mm)
 Torque Range : 20-50 In-Lbs



#802F37-11
 Blue Spring (ø 3.5 mm)
 Torque Range : 40-85 In-Lbs

► Adjusting springs of 2 different tensions are available for external adjustment of torque.



WX-8235F
1/4" Air Screwdriver
 - External Adjustable Clutch
 - Ergonomic Handle Design
 - Variable Speed Trigger
 - Low Noise 83 dB (A)
 - Handle Exhaust



WX-8225F
1/4" Air Screwdriver
 - External Adjustable Clutch
 - Ergonomic Handle Design
 - Variable Speed Trigger
 - Low Noise 83 dB (A)
 - Handle Exhaust




WX-9835
1/4" Air Screwdriver
 - External Adjustable Clutch
 - Ergonomic Handle Design
 - Variable Speed Trigger
 - Low Noise 83 dB (A)
 - Handle Exhaust



WX-9825
1/4" Air Screwdriver
 - External Adjustable Clutch
 - Ergonomic Handle Design
 - Variable Speed Trigger
 - Low Noise 83 dB (A)
 - Handle Exhaust

Model No.	Free Speed (RPM)	Hex Drive Capacity (Inch)	Air Inlet (NPT)	Air Consumption CFM (L/Min)	Hose Size ID Inch (mm)	Length Inch (mm)	Weight Lbs (Kg)	Torque (In-Lbs)	Noise Level dB (A)
WX-8225F	1,800	1/4"	1/4"	4 (113)	3/8"	7-3/4 (197)	2.9 (1.3)	20-50	83
WX-8235F	800	1/4"	1/4"	4 (113)	3/8"	8-7/16 (214)	3 (1.4)	40-85	83
WX-9825	1,800	1/4"	1/4"	4 (113)	3/8"	8-3/4 (222)	3.3 (1.5)	20-62	83
WX-9835	800	1/4"	1/4"	4 (113)	3/8"	9-1/2 (241)	3.5 (1.6)	20-100	83

Air Screwdrivers

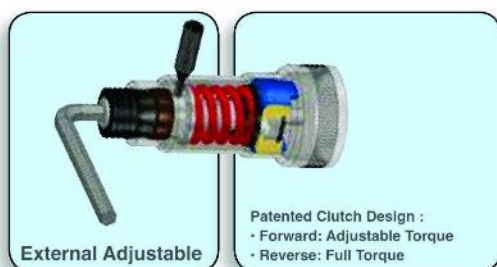

#802F37-11

Red Spring (ø 3.2 mm)
 Torque Range : 20~50 In-Lbs



#802F37-11

Blue Spring (ø 3.5 mm)
 Torque Range : 40~85 In-Lbs

► Adjusting springs of 2 different tensions are available for external adjustment of torque.



WX-83-8423F

1/4" Straight Air Screwdriver

- External Adjustable Clutch
- Forward : Adjustable Torque
- Reverse : Full Torque
- Low Noise 85 dB (A)



WX-82-8423F

1/4" Straight Air Screwdriver

- External Adjustable Clutch
- Forward : Adjustable Torque
- Reverse : Full Torque
- Low Noise 85 dB (A)



WX-843F

1/4" Straight Air Screwdriver

- External Adjustable Clutch
- Forward : Adjustable Torque
- Reverse : Full Torque
- Low Noise 85 dB (A)



WX-842F

1/4" Straight Air Screwdriver

- External Adjustable Clutch
- Forward : Adjustable Torque
- Reverse : Full Torque
- Low Noise 85 dB (A)

Model No.	Free Speed (RPM)	Hex Drive Capacity (Inch)	Air Inlet (NPT)	Air Consumption CFM (L/Min)	Hose Size ID Inch (mm)	Length Inch (mm)	Weight Lbs (Kg)	Torque (In-Lbs)	Noise Level dB (A)
WX-842F	1,800	1/4"	1/4"	4 (113)	3/8"	10 (254)	2.4 (1.1)	20-50	90
WX-843F	800	1/4"	1/4"	4 (113)	3/8"	10-1/4 (260)	2.6 (1.2)	40-85	90
WX-82-8423F	1,800	1/4"	1/4"	4 (113)	3/8"	10 (254)	2.6 (1.2)	20-50	85
WX-83-8423F	800	1/4"	1/4"	4 (113)	3/8"	10-3/4 (272)	3 (1.4)	40-85	85

Air Screwdrivers



WX-82-7500F

1/4" Air Screwdriver

- External Adjustable Clutch
- Composite Motor Housing
- Variable Speed Trigger
- 0.5 HP



WX-82-7500

1/4" Air Screwdriver

- Adjustable Clutch
- Composite Motor Housing
- Variable Speed Trigger
- 0.5 HP



WX-83-7500F

1/4" Air Screwdriver

- External Adjustable Clutch
- Composite Motor Housing
- Variable Speed Trigger
- 0.5 HP



WX-83-7500

1/4" Air Screwdriver

- Adjustable Clutch
- Composite Motor Housing
- Variable Speed Trigger
- 0.5 HP



WX-86-7500

1/4" Air Screwdriver

- Positive Clutch
- Composite Motor Housing
- Variable Speed Trigger
- 0.5 HP



WX-84-7500

1/4" Air Screwdriver

- Positive Clutch
- Composite Motor Housing
- Variable Speed Trigger
- 0.5 HP



Model No.	Free Speed (RPM)	Hex Drive Capacity (Inch)	Air Inlet (NPT)	Air Consumption CFM (L/Min)	Hose Size ID Inch (mm)	Length Inch (mm)	Weight Lbs (Kg)	Torque (In-Lbs)
WX-82-7500	1,800	1/4"	1/4"	4 (113)	3/8"	8-1/4 (208)	2.4 (1.1)	30-70
WX-83-7500	800	1/4"	1/4"	4 (113)	3/8"	9 (228)	2.6 (1.2)	30-95
WX-84-7500	1,800	1/4"	1/4"	4 (113)	3/8"	7-3/8 (187)	2.2 (1.0)	115
WX-86-7500	800	1/4"	1/4"	4 (113)	3/8"	8-1/8 (205)	2.4 (1.1)	145
WX-82-7500F	1,800	1/4"	1/4"	4 (113)	3/8"	8-1/4 (210)	2.4 (1.1)	20-50
WX-83-7500F	800	1/4"	1/4"	4 (113)	3/8"	9 (228)	2.6 (1.2)	45-85

Air Screwdrivers



WX-48-7500
1/4" Impact Driver
 - Composite Motor Housing
 - Handle Exhaust



WX-48-7254P
1/4" Hex Impact Driver
 - Composite Motor Housing
 - Two Speed Trigger
 - Hand Exhaust
 - Patented Silencer 84 dB (A)



WX-89-7500
1/4" Air Screwdriver
 - Direct Drive
 - Composite Motor Housing
 - Variable Speed Trigger
 - 0.5 HP



WX-88-7500
1/4" Air Screwdriver
 - Direct Drive
 - Composite Motor Housing
 - Variable Speed Trigger
 - 0.5 HP

Model No.	Free Speed (RPM)	Hex Drive Capacity (Inch)	Air Inlet (NPT)	Air Consumption CFM (L/Min)	Hose Size ID Inch (mm)	Length Inch (mm)	Weight Lbs (Kg)	Torque (In-Lbs)
WX-88-7500	1,800	1/4"	1/4"	4 (113)	3/8"	7-1/8 (181)	2.0 (0.9)	52
WX-89-7500	800	1/4"	1/4"	4 (113)	3/8"	7-7/8 (199)	2.4 (1.1)	130
WX-48-7500	12,000	1/4"	1/4"	4 (113)	3/8"	7-1/8 (181)	2.2 (1.0)	75
WX-48-7254P	11,000	1/4"	1/4"	4 (113)	3/8"	6-1/8 (155)	2.2 (1.0)	75

Air Screwdrivers



WX-802
1/4" Air Screwdriver
- Adjustable Clutch



WX-84-8020
1/4" Air Screwdriver
- Positive Clutch



WX-806
1/4" Air Screwdriver
- Positive Clutch



WX-803
1/4" Air Screwdriver
- Adjustable Clutch



WX-833
1/4" Air Screwdriver
- Positive Clutch



WX-832
1/4" Air Screwdriver
- Positive Clutch

Model No.	Free Speed (RPM)	Hex Drive Capacity (Inch)	Air Inlet (NPT)	Air Consumption CFM (L/Min)	Hose Size ID Inch (mm)	Length Inch (mm)	Weight Lbs (Kg)	Torque (In-Lbs)
WX-802	1,800	1/4"	1/4"	4 (113)	3/8"	8-1/16 (205)	2.4 (1.1)	30-70
WX-803	800	1/4"	1/4"	4 (113)	3/8"	8-7/8 (225)	2.9 (1.3)	30-95
WX-84-8020	1,800	1/4"	1/4"	4 (113)	3/8"	7-9/16 (192)	2.6 (1.2)	115
WX-806	800	1/4"	1/4"	4 (113)	3/8"	8-1/4 (210)	2.6 (1.2)	145
WX-832	1,800	1/4"	1/4"	4 (113)	3/8"	8-1/16 (205)	2.5 (1.1)	115
WX-833	800	1/4"	1/4"	4 (113)	3/8"	8-3/4 (223)	2.9 (1.3)	145

Air Screwdrivers



WX-813
1/4" Air Screwdriver
- Adjustable Clutch



WX-812
1/4" Air Screwdriver
- Adjustable Clutch



WX-820
1/4" Air Screwdriver
- Positive Clutch



WX-816
1/4" Air Screwdriver
- Positive Clutch



WX-853
1/4" Air Screwdriver
- Positive Clutch



WX-852
1/4" Air Screwdriver
- Positive Clutch

Model No.	Free Speed (RPM)	Hex Drive Capacity (Inch)	Air Inlet (NPT)	Air Consumption CFM (L/Min)	Hose Size ID Inch (mm)	Length Inch (mm)	Weight Lbs (Kg)	Torque (In-Lbs)
WX-812	1,800	1/4"	1/4"	4 (113)	3/8"	8-1/4 (210)	2.6 (1.2)	30-70
WX-813	800	1/4"	1/4"	4 (113)	3/8"	9 (228)	2.9 (1.3)	30-95
WX-816	1,800	1/4"	1/4"	4 (113)	3/8"	8-3/8 (212)	2.6 (1.2)	145
WX-820	2,000	1/4"	1/4"	4 (113)	3/8"	8 (203)	2.6 (1.2)	115
WX-852	1,800	1/4"	1/4"	4 (113)	3/8"	8-1/16 (205)	2.5 (1.1)	115
WX-853	800	1/4"	1/4"	4 (113)	3/8"	8-3/4 (223)	2.9 (1.3)	145

Air Screwdrivers



WX-842
1/4" Air Screwdriver
- Adjustable Clutch



WX-84-8420
1/4" Air Screwdriver
- Positive Clutch



WX-846
1/4" Air Screwdriver
- Positive Clutch



WX-843
1/4" Air Screwdriver
- Adjustable Clutch



WX-863
1/4" Air Screwdriver
- Positive Clutch



WX-862
1/4" Air Screwdriver
- Positive Clutch

Model No.	Free Speed (RPM)	Hex Drive Capacity (Inch)	Air Inlet (NPT)	Air Consumption CFM (L/Min)	Hose Size ID Inch (mm)	Length Inch (mm)	Weight Lbs (Kg)	Torque (In-Lbs)
WX-842	1,800	1/4"	1/4"	4 (113)	3/8"	9-1/2 (242)	2.5 (1.1)	30-70
WX-843	800	1/4"	1/4"	4 (113)	3/8"	10-1/4 (260)	2.6 (1.2)	30-95
WX-84-8420	1,800	1/4"	1/4"	4 (113)	3/8"	9-1/16 (230)	2.5 (1.1)	115
WX-846	2,000	1/4"	1/4"	4 (113)	3/8"	9-5/16 (236)	2.6 (1.2)	145
WX-862	1,800	1/4"	1/4"	4 (113)	3/8"	9-7/16 (240)	2.5 (1.1)	45-115
WX-863	800	1/4"	1/4"	4 (113)	3/8"	10-3/16 (258)	2.6 (1.2)	45-145

Air Screwdrivers



WX-0909
1/4" Air Screwdriver
- Adjustable Clutch



WX-0905
1/4" Air Screwdriver
- Impact Type clutch



WX-873
1/4" Air Screwdriver
- External Adjustable Clutch



WX-872
1/4" Air Screwdriver
- External Adjustable Clutch



WX-883
1/4" Air Screwdriver
- External Adjustable Clutch



WX-882
1/4" Air Screwdriver
- External Adjustable Clutch

Model No.	Free Speed (RPM)	Hex Drive Capacity (Inch)	Air Inlet (NPT)	Air Consumption CFM (L/Min)	Hose Size ID Inch (mm)	Length Inch (mm)	Weight Lbs (Kg)	Torque (In-Lbs)
WX-0905	8,000	1/4"	1/4"	4 (113)	3/8"	7 (177)	1.5 (0.7)	20-60
WX-0909	1,500	1/4"	1/4"	4 (113)	3/8"	9-1/8 (231)	1.33 (0.6)	10-30
WX-872	1,800	1/4"	1/4"	4 (113)	3/8"	10-1/2 (266)	3 (1.4)	45-115
WX-873	800	1/4"	1/4"	4 (113)	3/8"	11-1/2 (292)	3.3 (1.5)	45-145
WX-882	1,800	1/4"	1/4"	4 (113)	3/8"	9-3/16 (234)	3 (1.4)	45-115
WX-883	800	1/4"	1/4"	4 (113)	3/8"	9-15-16 (252)	3.3 (1.5)	45-145

Air Screwdrivers



WX-83-7251
1/4" Air Screwdriver
- Adjustable Clutch



WX-82-7251
1/4" Air Screwdriver
- Impact Type clutch



WX-84-7251
1/4" Air Screwdriver
- External Adjustable Clutch



WX-84-8140
1/4" Air Screwdriver
- External Adjustable Clutch



WX-802
1/4" Air Screwdriver
- External Adjustable Clutch



WX-85-7251
1/4" Air Screwdriver
- External Adjustable Clutch

Model No.	Free Speed (RPM)	Hex Drive Capacity (Inch)	Air Inlet (NPT)	Air Consumption CFM (L/Min)	Hose Size ID Inch (mm)	Length Inch (mm)	Weight Lbs (Kg)	Torque (In-Lbs)
WX-802	1,800	1/4"	1/4"	4 (113)	3/8"	8-1/16 (205)	1.4 (1.1)	30-70
WX-82-7251	1,800	1/4"	1/4"	4 (113)	3/8"	7-11/16 (196)	2-5/6 (1.3)	30-70
WX-83-7251	800	1/4"	1/4"	4 (113)	3/8"	8-7/16 (214)	3-1/10 (1.4)	30-95
WX-84-8140	1,800	1/4"	1/4"	4 (113)	3/8"	7-5/8 (194)	2.6 (1.2)	115
WX-84-7251	1,800	1/4"	1/4"	4 (113)	3/8"	7-3/16 (182)	2-2/3 (1.2)	115
WX-85-7251	800	1/4"	1/4"	4 (113)	3/8"	9-1/2 (242)	3-1/2 (1.6)	20-100