

Chipping Hammers



Features :

- Heat Treated Precision Cylinder and Piston for Long Life
- Heavy-duty Hammer Provides Hard-hitting Powerful Blows
- Replaceable Bushing, Hex and Round Types
- Available with Four Different Stroke Lengths, Wide Selection to Suit the Job



WX-DR-200V
2" Chipping Hammer
- Bushing Size : 0.680 Round
WX-DH-200V
2" Chipping Hammer
- Bushing Size : 0.580 Hex



WX-DR-100V
1" Chipping Hammer
- Bushing Size : 0.680 Round
WX-DH-100V
1" Chipping Hammer
- Bushing Size : 0.580 Hex



WX-DR-400V
1" Chipping Hammer
- Bushing Size : 0.680 Round
WX-DH-400V
1" Chipping Hammer
- Bushing Size : 0.580 Hex



WX-DR-300V
3" Chipping Hammer
- Bushing Size : 0.680 Round
WX-DH-300V
3" Chipping Hammer
- Bushing Size : 0.580 Hex

Model No.	Bushing Size (Inch)	Blows Per Minute	Bore Size Inch (mm)	Air Consumption CFM (L/Min)	Hose Size ID Inch (mm)	Length Inch (mm)	Weight Lbs (Kg)	Stroke Length	Air Inlet (NPT)	Air Cons (CFM)
WX-DR-100V WX-DH-100V	0.680 R 0.580 H	2,450	1-1/8 (28)	6 (150)	12 (13)	8 (203)	13-5/8 (345)	2.5"	3.8"	24
WX-DR-200V WX-DH-200V	0.680 R 0.580 H	2,300	1-1/8 (28)	6.5 (165)	12 (13)	8-7/16 (214)	14-12 (369)	3.0"	3.8"	26
WX-DR-300V WX-DH-300V	0.680 R 0.580 H	2,100	1-1/8 (28)	7.5 (190)	12 (13)	12-1/2 (358)	15-5/8 (397)	3.75"	3.8"	30
WX-DR-400V WX-DH-400V	0.680 R 0.580 H	1,700	1-1/8 (28)	8.3 (211)	12 (13)	14-1/8 (358)	16-3/4 (426)	4.25"	3.8"	33

Air Hammers



Features :

- Dual Elastomer Cushion Absorb Shock and Vibration to Reduce User Fatigue
- Direct Multi-Port Front Exhaust Keeps Air and Away from User
- High Grade Steel Barrel Provides Greater Strength
- Hardened Steel Deliver Harder Blows for Maximum Impact

WX-108K

Super Duty Air Hammer Kit



WX-108

Super Duty Air Hammer

- Vibration Damped
- Round Shank

Features :

- Precision Spool Valve Design System to Ensure Maximum Power Against Light Body Weight
- Least Vibration at Handle to Reduce Fatigue
- Easy to Handle Good Weight Balance

> Quick Change Retainer



WX-TH-1830

Air Chipping Hammer

- Vibration Damped
- Hex. Shank



Model No.	Bore Size	Blows Per Minute	Stroke Length Inch (mm)	Air Consumption CFM (L/Min)	Hose Size ID Inch (mm)	Length Inch (mm)	Weight Lbs (Kg)	Shank Opening Inch (mm)	Air Inlet (NPT)
WX-108	3/4"	2,500	3 (76)	1.8 (51)	5/16 (8)	8 (203)	9-1/4 (234)	0.401 (10.1)	1/4"
WX-TH-1830	18 mm	5,000	1-1/4 (30)	3 (85)	3/8 (10)	8-7/16 (214)	9-3/8 (238)	7/16 (11.1)	1/4"

Air Hammers



WX-0102R

135mm Air Hammer

- Round Shank

WX-0102H

135mm Air Hammer

- Hex Shank



WX-0101R

Short Air Hammer

- Round Shank

WX-0101H

Short Air Hammer

- Hex Shank



WX-0204R

Medium Air Hammer

- Round Shank

WX-0204H

Medium Air Hammer

- Hex Shank



WX-0304R

Long Air Hammer

- Round Shank

WX-0304H

Long Air Hammer

- Hex Shank



WX-0204PSR

Medium Air Hammer Kit



WX-0304PSR

Long Air Hammer Kit



Model No.	Bore Size	Air Inlet (NPT)	Hose Size Inch (mm)	Air Consumption CFM (L/Min)	Length Inch (mm)	Weight Lbs (Kg)	Blows Per Minute (BPM)	Stroke Length Inch (mm)	Shank Opening Inch (mm)
WX-0101R WX-0101H	3/4"	1/4"	3/8 (10)	4 (113)	5-1/4 (133)	3 (1.4)	5,000	1-5/8 (41)	0.401 (10.2)
WX-0102R WX-0102H	3/4"	1/4"	3/8 (10)	4 (113)	5-3/4 (150)	3.3 (1.5)	4,500	1-5/8 (41)	0.401 (10.2)
WX-0204R WX-0204H	3/4"	1/4"	3/8 (10)	4 (113)	6-3/4 (171)	3.5 (1.6)	3,200	2-5/8 (67)	0.401 (10.2)
WX-0304R WX-0304H	3/4"	1/4"	3/8 (10)	4 (113)	9 (229)	4 (1.9)	2,000	3-1/2 (89)	0.401 (10.2)

Air Hammers



WX-2711R

Heavy Duty Medium Hammer

- Round Shank

WX-2711H

Heavy Duty Medium Hammer

- Hex Shank



WX-2715R

Heavy Duty Long Hammer

- Round Shank

WX-2715H

Heavy Duty Long Hammer

- Hex Shank



WX-0218-5X

Riveting Hammer

WX-0218-7X

Riveting Hammer

WX-0218-9X

Riveting Hammer



WX-0218-2X

Riveting Hammer

WX-0218-3X

Riveting Hammer

WX-0218-4X

Riveting Hammer



WX-2711PSR

Heavy Duty Medium Hammer Kit



WX-2715PSR

Heavy Duty Long Hammer Kit



Model No.	Bore Size	Air Inlet (NPT)	Hose Size Inch (mm)	Air Consumption CFM (L/Min)	Length Inch (mm)	Weight Lbs (Kg)	Blows Per Minute (BPM)	Stroke Length Inch (mm)	Shank Opening Inch (mm)
WX-2711R WX-2711H	3/4"	1/4"	3/8 (10)	4 (113)	6-3/4 (171)	3.5 (1.6)	3,200	2-5/8 (67)	0.401 (10.2)
WX-2715R WX-2715H	3/4"	1/4"	3/8 (10)	4 (113)	8-7/8 (226)	4.2 (1.9)	2,100	3-1/2 (89)	0.401 (10.2)
WX-0218-2X WX-0218-3X	3/4"	1/4"	3/8 (10)	4 (113)	7-1/4 (185) 8-1/4 (210)	2.6 (1.2) 2.9 (1.3)	3,000 2,600	2 (50) 3 (75)	0.401 (10.2)
WX-0218-4X WX-0218-5X	3/4"	1/4"	3/8 (10)	4 (113)	9-1/4 (236) 19-7/16 (494)	3.1 (1.4) 4.8 (2.2)	2,400 1,560	4 (100) 5 (125)	0.401 (10.2)
WX-0218-7X WX-0218-9X	3/4"	1/4"	3/8 (10)	4 (113)	10-1/4 (260) 11-13/16 (300)	5.3 (2.4) 5.8 (2.65)	1,160 900	7 (180) 9 (229)	0.401 (10.2)

Air Hammers



WX-102
Short Air Hammer
- Hex Shank



WX-0123R
Mini Chipping Hammer
- Round Shank



WX-0122R-1
Chipping Hammer
WX-0122R-2
Chipping Hammer
WX-0122R-3
Chipping Hammer
WX-0122R-4
Chipping Hammer
- Round Shank



Model No.	Bore Size	Air Inlet (NPT)	Hose Size Inch (mm)	Air Consumption CFM (L/Min)	Length Inch (mm)	Weight Lbs (Kg)	Blows Per Minute (BPM)	Stroke Length Inch (mm)	Shank Opening Inch (mm)
WX-102	3/4"	1/4"	3/8 (10)	4 (113)	6-3/4 (171)	3.4 (1.5)	5,000	1-5/8 (41)	7/16 (11.1)
WX-0123R	25/32"	1/4"	3/8 (10)	4 (113)	11-1/2 (290)	5.1 (2.3)	3,000	2-1/2 (38)	0.551 (14)
WX-0122R-1	1-1/8"	3/8"	1/2 (12.7)	6 (170)	12-1/2 (318)	14.5 (6.6)	2,100	1 (25.4)	0.680 (17.3)
WX-0122R-2	1-1/8"	3/8"	1/2 (12.7)	7 (198)	13-1/2 (337)	15.2 (6.9)	1,900	2 (50)	0.680 (17.3)
WX-0122R-3	1-1/8"	3/8"	1/2 (12.7)	8 (226)	15-1/2 (388)	16 (7.3)	1,700	3 (75)	0.680 (17.3)
WX-0122R-4	1-1/8"	3/8"	1/2 (12.7)	8 (226)	16-1/2 (420)	18 (8.2)	1,400	4 (100)	0.680 (17.3)



Paving Breakers

> Drop-Forged Cylinder



Paving Breakers



Features :

- Large Diameter, Smooth Stroke Piston
- All Shank Sizes Accommodate Standard Steel
- Efficient Valve Chest for Low-Maintenance
- Replaceable Front Head Bushing
- Full Control Throttle
- Drop-Forged Cylinder
- Chisel Retainer Latch
- Rubber Handle Grips

WX-P611

Paving Breaker

- Shank Size : 1-1/8" x 6"

WX-P612

Paving Breaker

- Shank Size : 1-1/4" x 6"



WX-P911

Paving Breaker

- Shank Size : 1-1/8" x 6"

WX-P912

Paving Breaker

- Shank Size : 1-1/4" x 6"



Model No.	Piston Diameter Inch (mm)	Piston Stroke Inch (mm)	Blow Per Min. (BPM)	Shank Size Inch (mm)	Air Inlet (NPT)	Hose Size ID Inch (mm)	Average Air Consumption CFN (L/Min)	Length Inch (mm)	Weight Lbs (Kg)
WX-P611	2-1/4 (57.15)	4 (100)	1,400	1-1/8x6 (28x152)	3/4"	3/4 (19)	70 (2,000)	26-1/2 (672)	66 (30)
WX-P612	2-1/4 (57.15)	4 (100)	1,400	1-1/4x6 (32x152)	3/4"	3/4 (19)	70 (2,000)	26-1/2 (672)	66 (30)
WX-P911	2-5/8 (66.67)	6 (152)	1,400	1-1/8x6 (28x152)	3/4"	3/4 (19)	77 (2,200)	29-5/8 (752)	92.4 (42)
WX-P912	2-5/8 (66.67)	6 (152)	1,400	1-1/4x6 (32x152)	3/4"	3/4 (19)	77 (2,200)	29-5/8 (752)	92.4 (42)

Engraving Tools



WX-0754
Engraving Tool
- Plastic Housing



WX-0753
Engraving Tool
- Steel Housing



WX-10-1001
Scribe / Engraving Chisel

- Provides Sufficient Power for Engraving & Mini Chipping Application
- High Precision Throttle Ensures Critical Control
- Best for : Precision Engraving of Metals, Stone and Marble



WX-10-1001K
Scribe / Engraving Chisel Kit

- 1 pc Scribe/Engraving Chisel
- 1 pc Air Filter Assembly
- 1 pc Chisel Joint for Use with Chisel
- 1 pc Pen Chisel - Tungsten Carbide Tipped Writing & Engraving
- 1 pc Chisel A / Customize to Suit
- 1 pc Chisel B / Cutting & Deburring
- 1 pc Chisel C / Scaling & Deburring



#10-100113-11S
Air Filter Assembly



#10-100108-11S
Chisel Joint



#10-100109
Pen Chisel



#10-100110
Chisel A



#10-100111
Chisel B



#10-100112
Chisel C

Model No.	Blows Per Min. (BPM)	Air Inlet (NPT)	Hose Size Inch (mm)	Air Consumption CFM (L/Min)	Length Inch (mm)	Weight Lbs (Kg)
WX-0573	3,800	1/4"	1/4 (6)	2 (57)	6-3/4 (171)	0.4 (0.2)
WX-0574	3,800	1/4"	1/4 (6)	2 (57)	6-3/4 (171)	0.4 (0.2)
WX-10-1001	13,500	1/4"	1/4 (6)	1.1 (31)	4.8 (122)	0.3 (0.14)

Needle Scalers & Flux Chipper



WX-0315
Flux Chipper



WX-104
Flux Chipper



WX-9121
Flux Chipper



WX-2288
Flux Chipper



WX-0315NS
Needle Scaler



WX-9121NS
Needle Scaler



WX-2280
Needle Scaler



WX-2288NS
Needle Scaler



Model No.	Blow Per Min. (BPM)	Needle Dia. (mm)	Air Inlet	Hose Size ID Inch (mm)	Needle Per Tool (Pc)	Air Consumption CFM (L/Min)	Overall Length Inch (mm)	Weight Lbs (Kg)
WX-104	5,400	—	1/4"	3/8 (10)	—	1 (28.33)	6-3/4 (172)	1.78 (0.8)
WX-0315	4,000	—	1/4"	3/8 (10)	—	4 (113)	13-1/8 (333)	3.5 (1.6)
WX-0315NS	4,000	3	1/4"	3/8 (10)	19	4 (113)	16-3/8 (416)	5.72 (2.6)
WX-2280	4,500	3 or 4	3/8"	1/2 (13)	28 or 14	9 (255)	14 (356)	7.75 (3.5)
WX-2288	4,000	—	1/4"	3/8 (10)	—	4 (113)	9-7/8 (250)	2 (0.9)
WX-2288NS	4,000	3	1/4"	3/8 (10)	12	4 (113)	11-7/16 (290)	2.6 (1.2)
WX-9121	4,600	—	1/4"	3/8 (10)	—	4 (113)	14-1/2 (368)	3 (1.4)
WX-9121NS	4,600	3	1/4"	3/8 (10)	19	4 (113)	15 (381)	5.5 (2.5)

Needle Scalers & Flux Chipper



WX-0204RNS
Needle Scaler



WX-0815
Air Scarper




WX-2110NS
Needle Scaler



WX-2100NS
Needle Scaler



WX-2200
Scaling Hammer

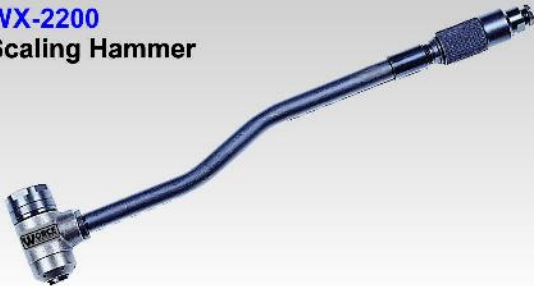

WX-2111NS
Needle Scaler



Model No.	Blow Per Min. (BPM)	Needle Dia. (mm)	Air Inlet	Hose Size ID Inch (mm)	Needle Per Tool (Pc)	Air Consumption CFM (L/Min)	Overall Length Inch (mm)	Weight Lbs (Kg)
WX-0815	4,500	—	1/4"	3/8 (10)	—	4.5 (115)	9-3/4 (248)	1.5 (0.7)
WX-0204RNS	3,200	3	1/4"	3/8 (10)	19	4 (113)	15-3/4 (400)	4.2 (2.2)
WX-2100NS	3,000	2 or 3	1/4"	3/8 (10)	28 or 19	4 (113)	14-13/16 (376)	5.7 (2.6)
WX-2110NS	3,000	3	1/4"	3/8 (10)	19	4 (113)	13-3/8 (340)	5.7 (2.6)
WX-2111NS	2,200	3 or 4	1/4"	3/8 (10)	49 or 35	9 (255)	15-11/16 (399)	11 (5)
WX-2200	8,000	3	1/4"	3/8 (10)	—	4 (113)	22-3/8 (566)	4.8 (1.9)